


613 WEST LYNN


19 JULY 2021




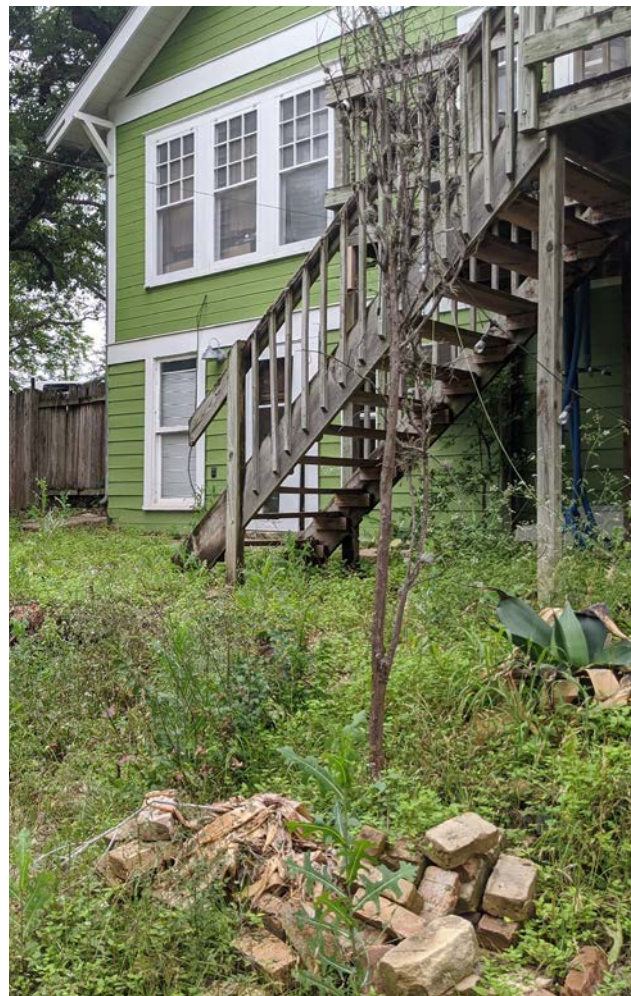

PROJECT CODE ANALYSIS


ZONING:	MF-4 NP
PARCEL ID:	106602
CONSTRUCTION TYPE:	V.B
LOT SIZE:	10,130 SQFT (.233 ACRES)
FLOOR AREA RATIO:	PROVIDED: 39% (3,934 SQFT) ALLOWED: MAX 40% (4,052 SQFT)
IMPERVIOUS COVERAGE:	PROVIDED: 44% (4473.5) ALLOWED: 45% (4558.5)
AIR CONDITIONED AREA:	4,854 SQFT
MAIN HOUSE	
BASEMENT FLOOR:	1,187 SQFT
LEVEL 01:	1,868 SQFT
LEVEL 02:	701 SQFT
TOTAL:	3,756 SQFT
ADU	
LEVEL 01:	549 SQFT
LEVEL 02:	549 SQFT
TOTAL:	1,098 SQFT
CARPORT:	267 SQFT
GARAGE:	445 SQFT

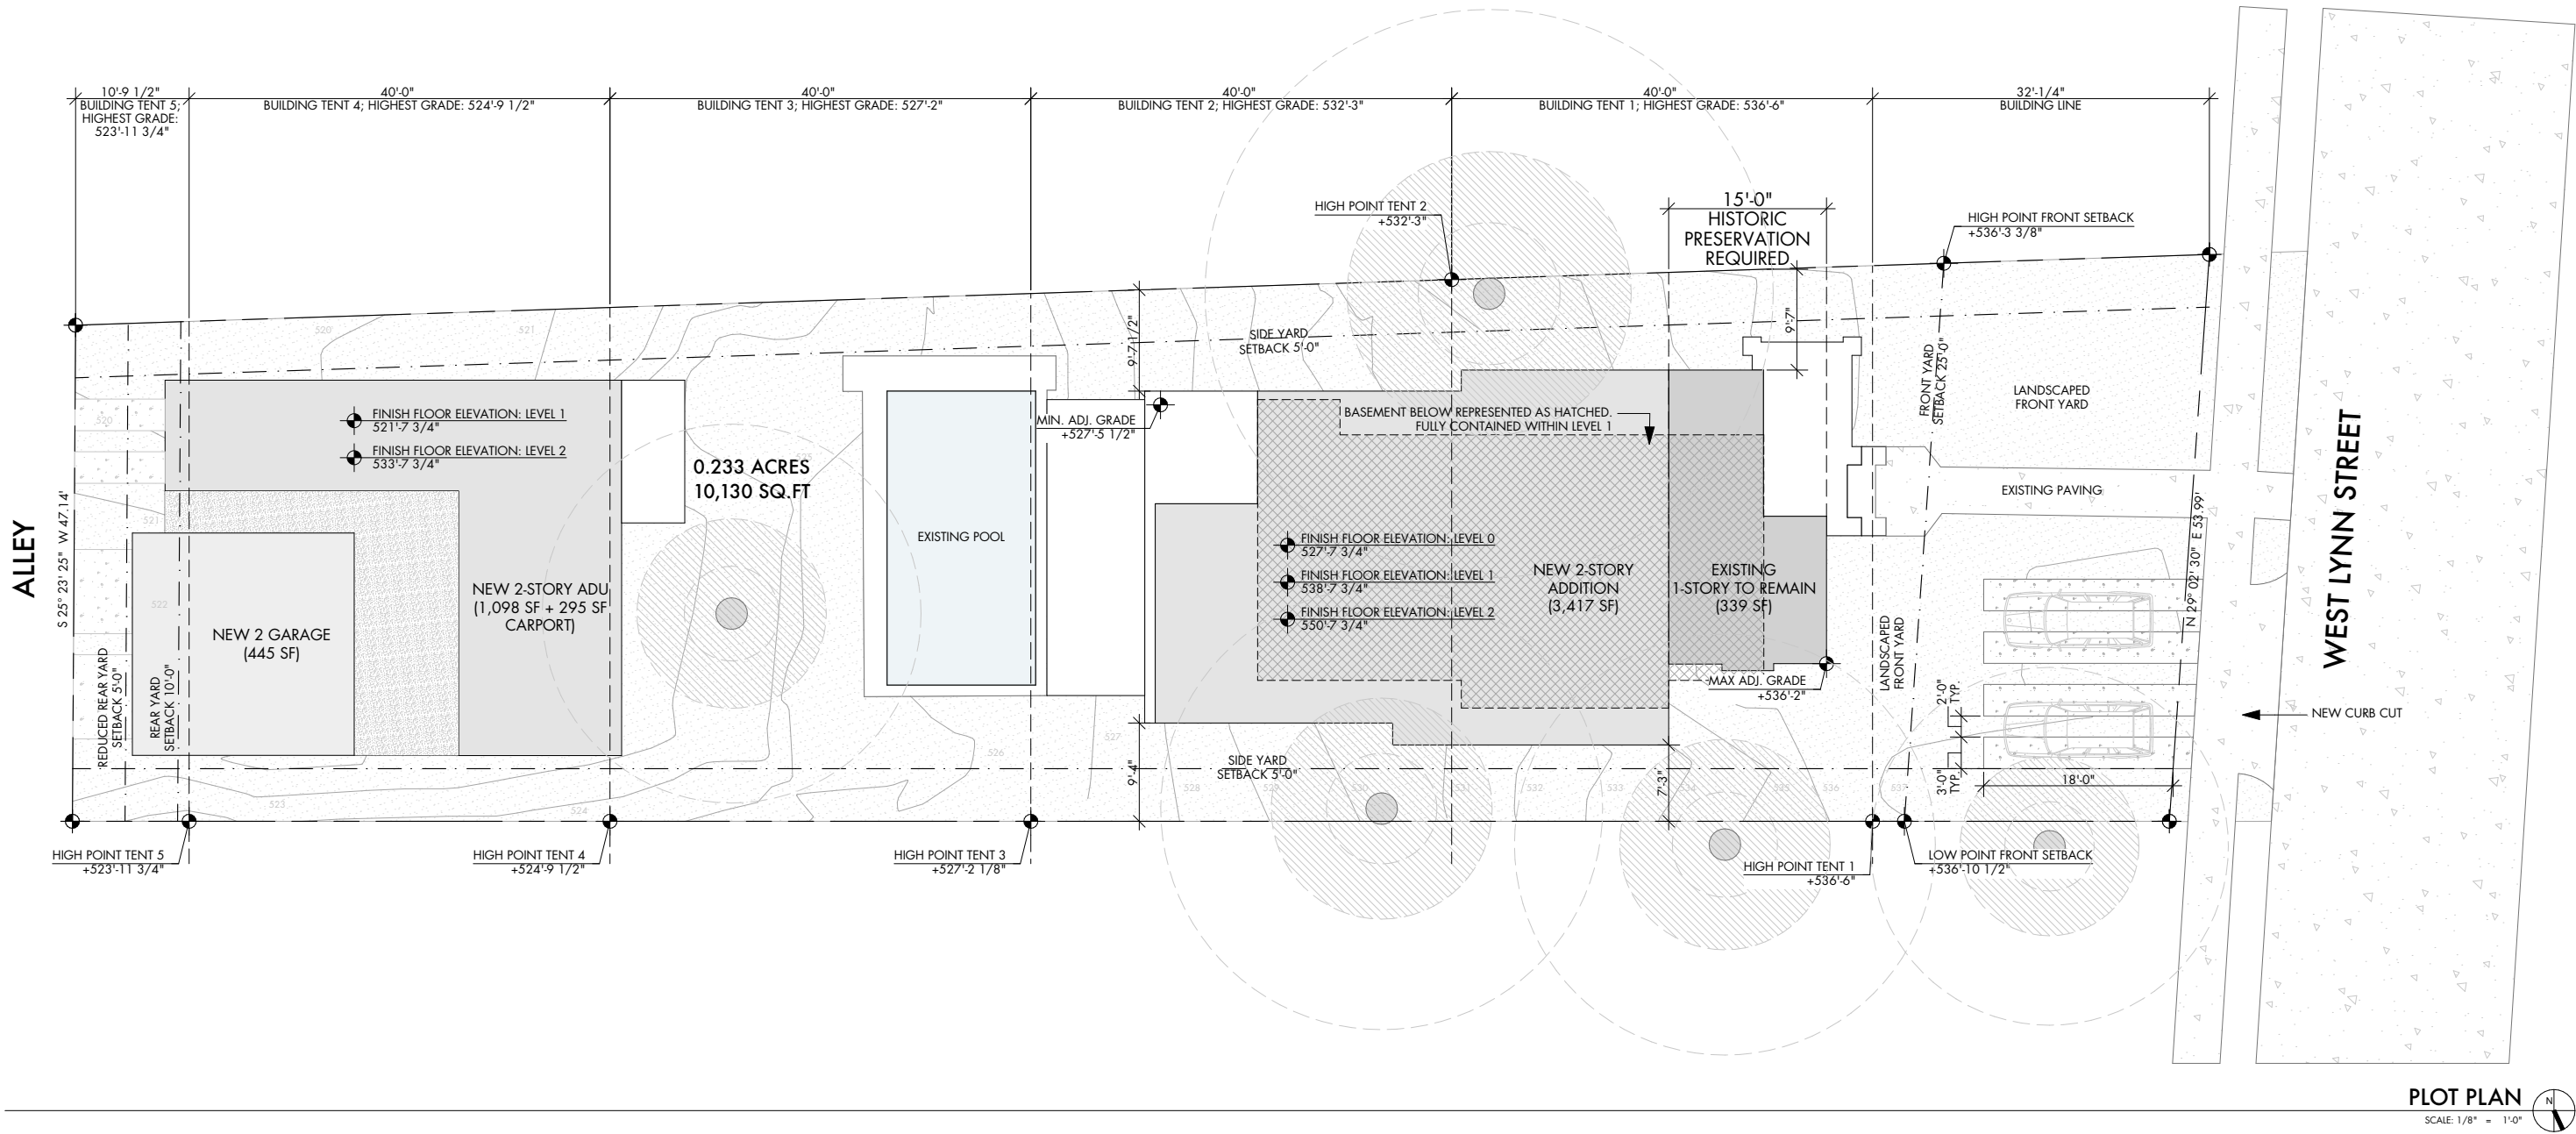

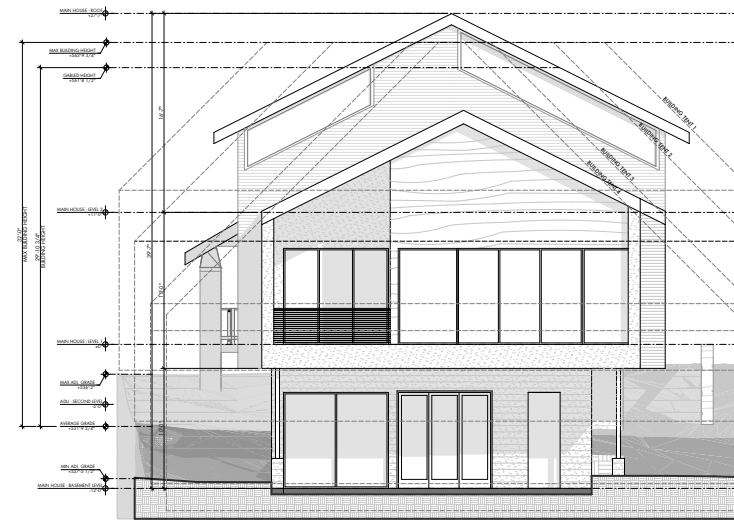


EXTERIOR ELEVATION @ EAST

SCALE: 1/8" = 1'-0"

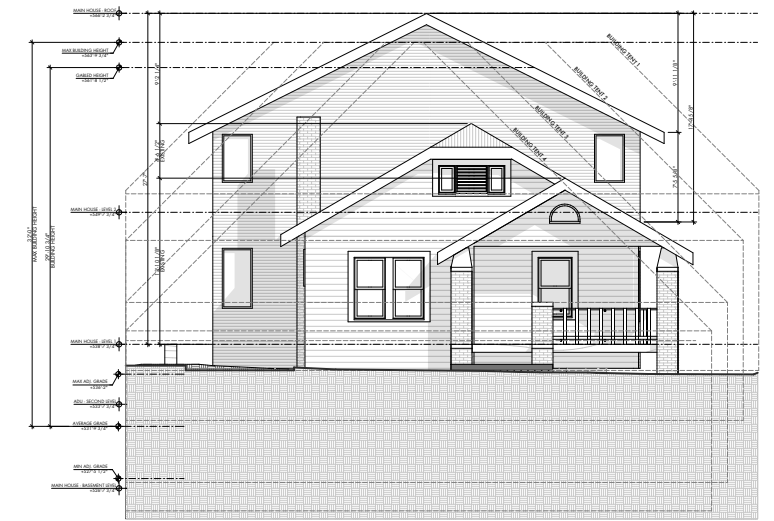


EXTERIOR ELEVATION @ WEST

SCALE: 1/8" = 1'-0"

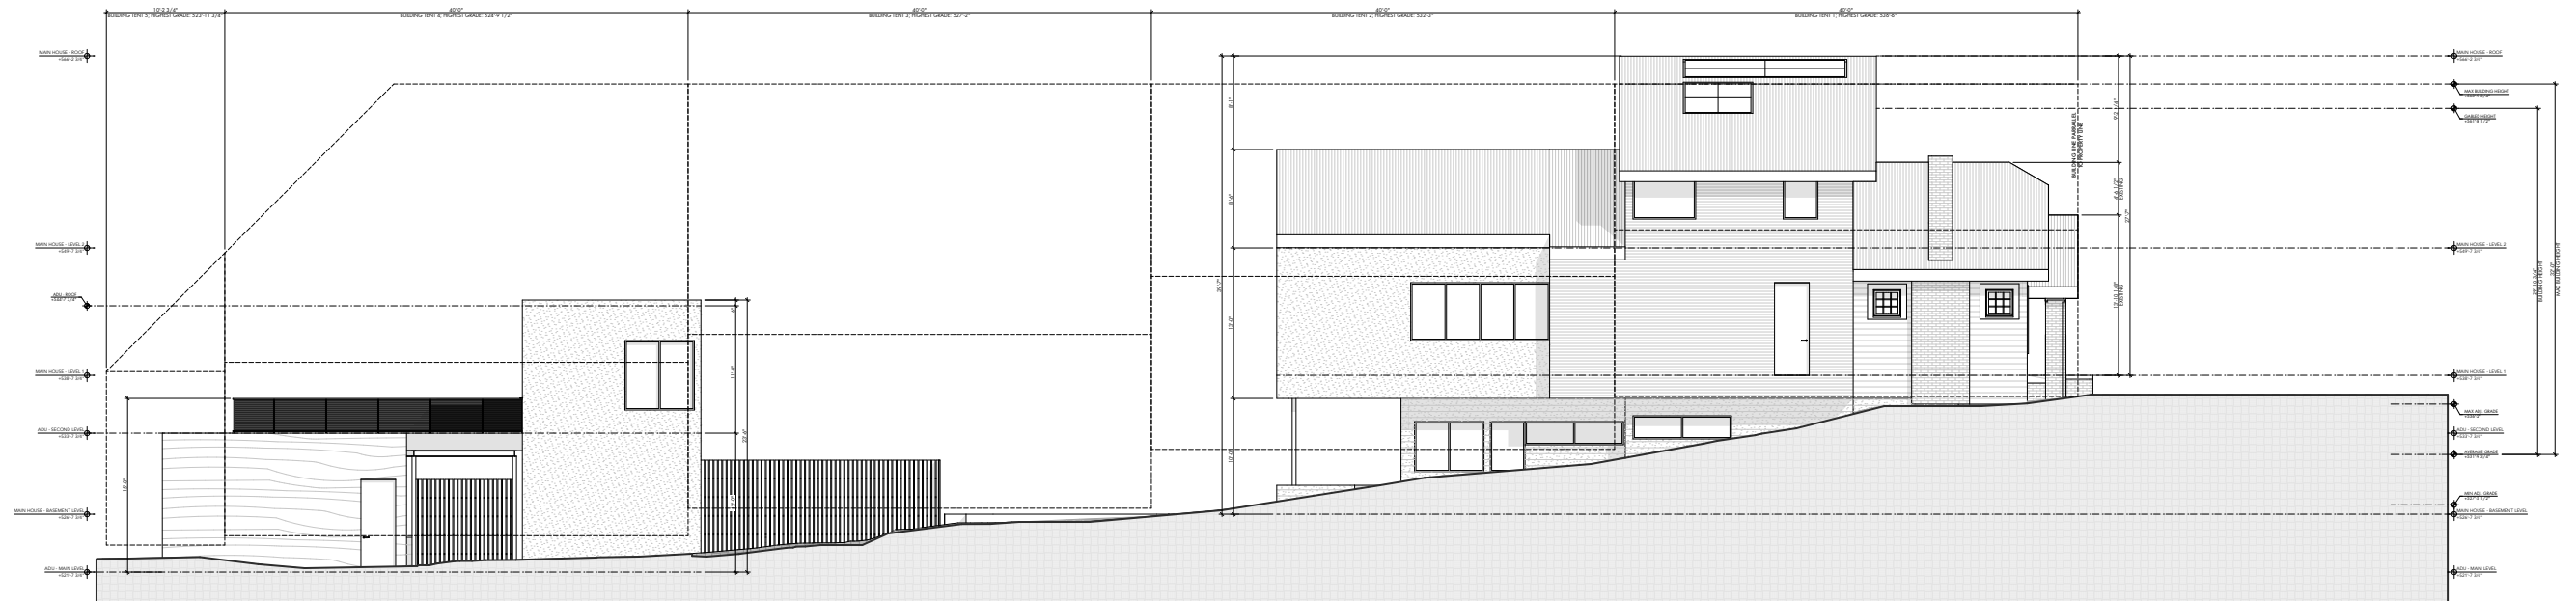

EXTERIOR ELEVATION @ NORTH


SCALE: 1/8" = 1'-0"

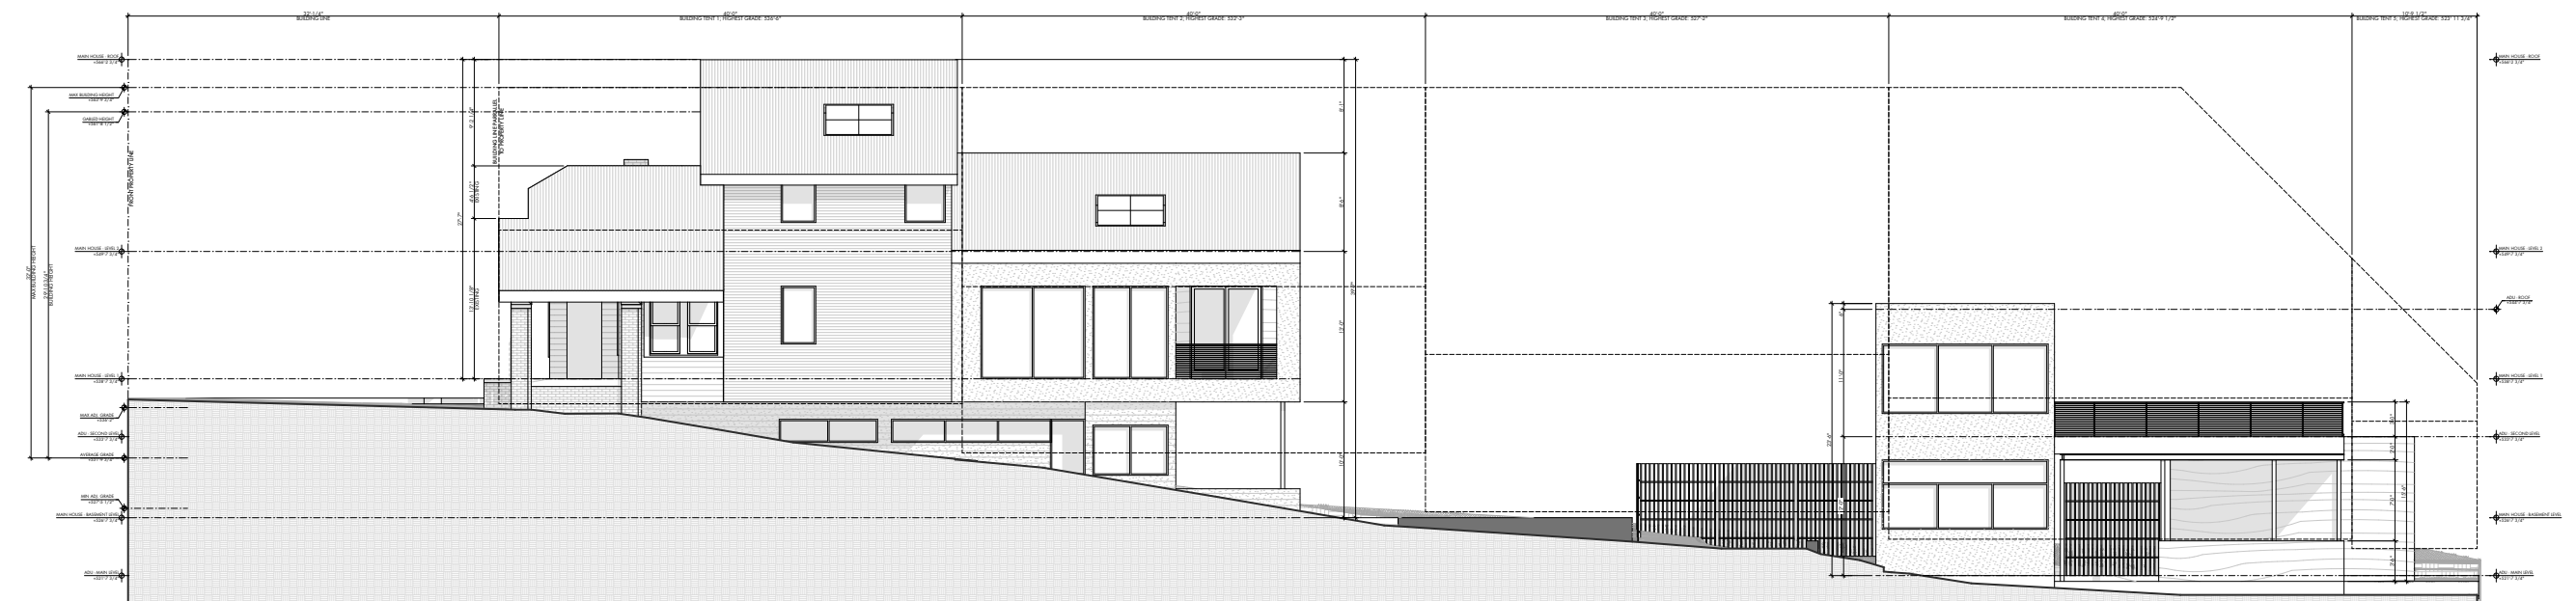


EXTERIOR ELEVATION @ SOUTH

SCALE: 1/8" = 1'-0"

AUSTIN MCMANSION BUILDING TENTS

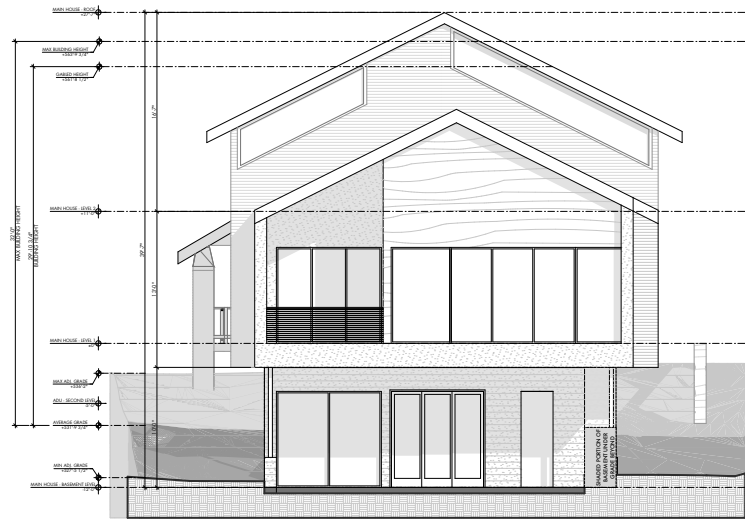


EXTERIOR ELEVATION @ EAST
SCALE: 1/8" = 1'-0"

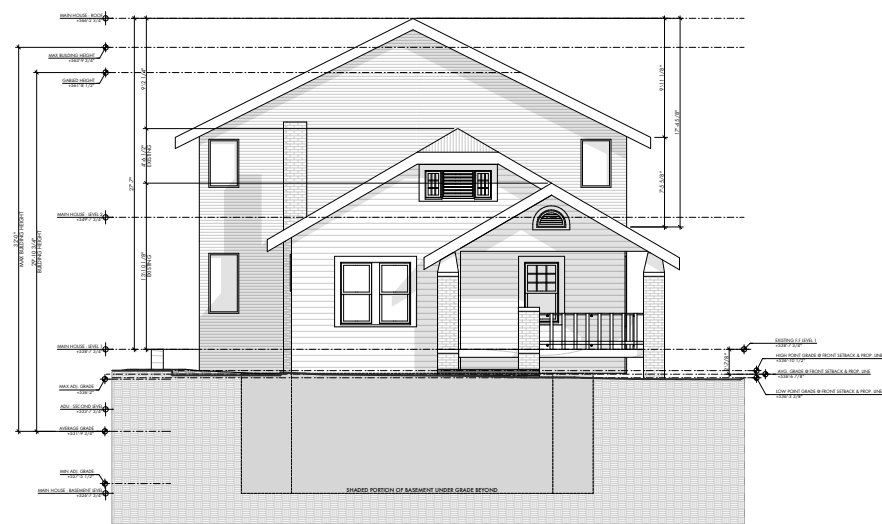


EXTERIOR ELEVATION @ WEST
SCALE: 1/8" = 1'-0"

BASEMENT EXEMPTION LEGEND	
	WALL AREA BELOW GRADE
	PERIMETER OF BASEMENT WALL


WALL AREA CALCULATIONS			
	TOTAL WALL AREA	WALL AREA BELOW GRADE	% BELOW GRADE
TOTAL	1,566 SF	869 SF	55.49 %
NORTH	490 SF	296 SF	60.4%
SOUTH	490 SF	272 SF	55.5%
EAST	293 SF	13 SF	4.4%
WEST	293 SF	288 SF	98.3%

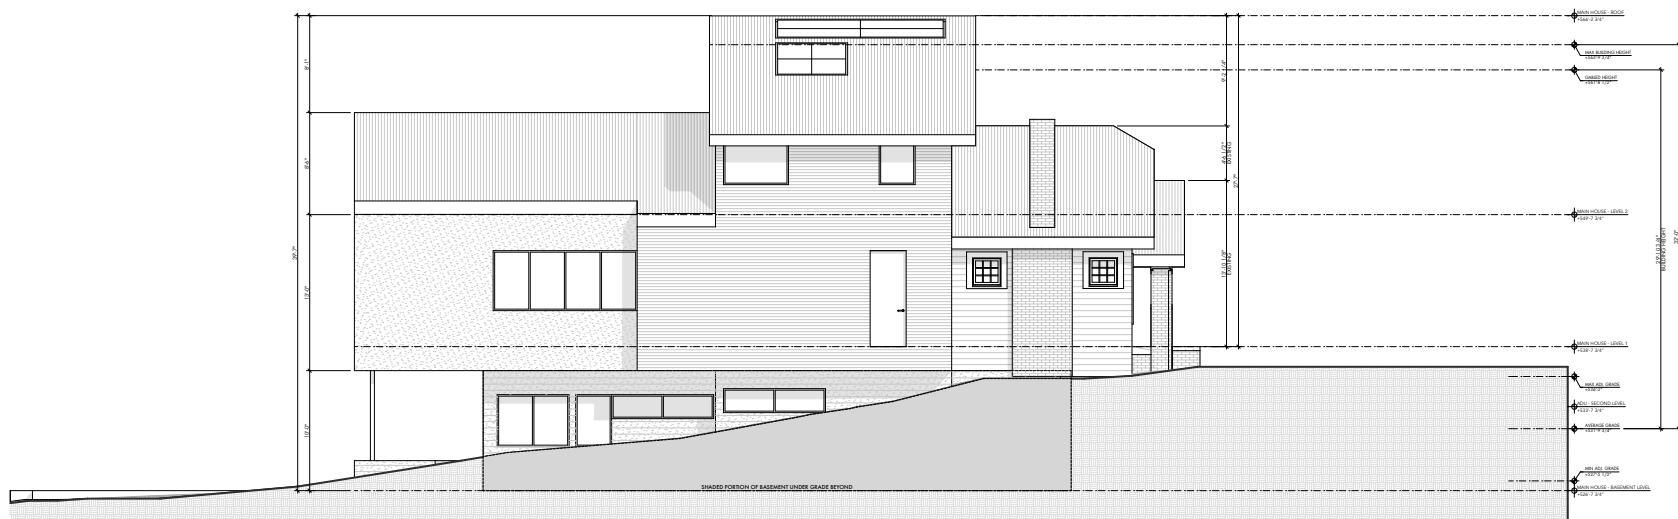

EXTERIOR ELEVATION @ NORTH
SCALE: 1/8" = 1'-0"

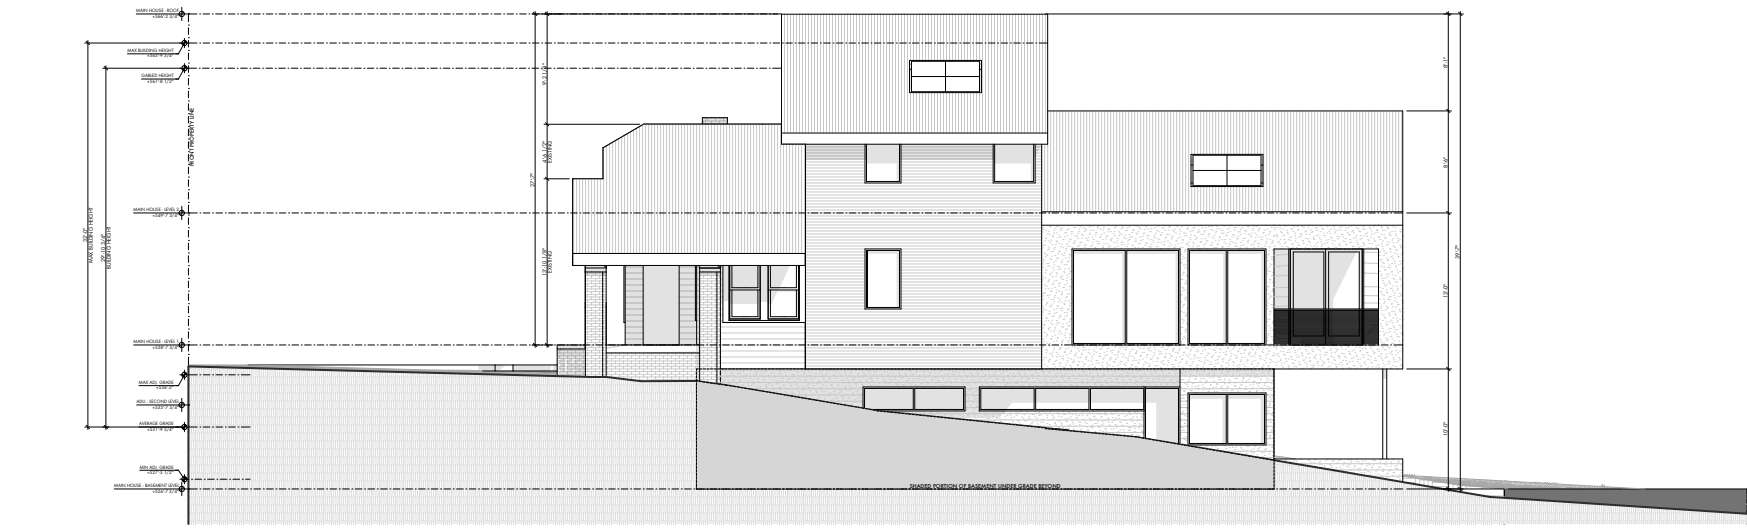

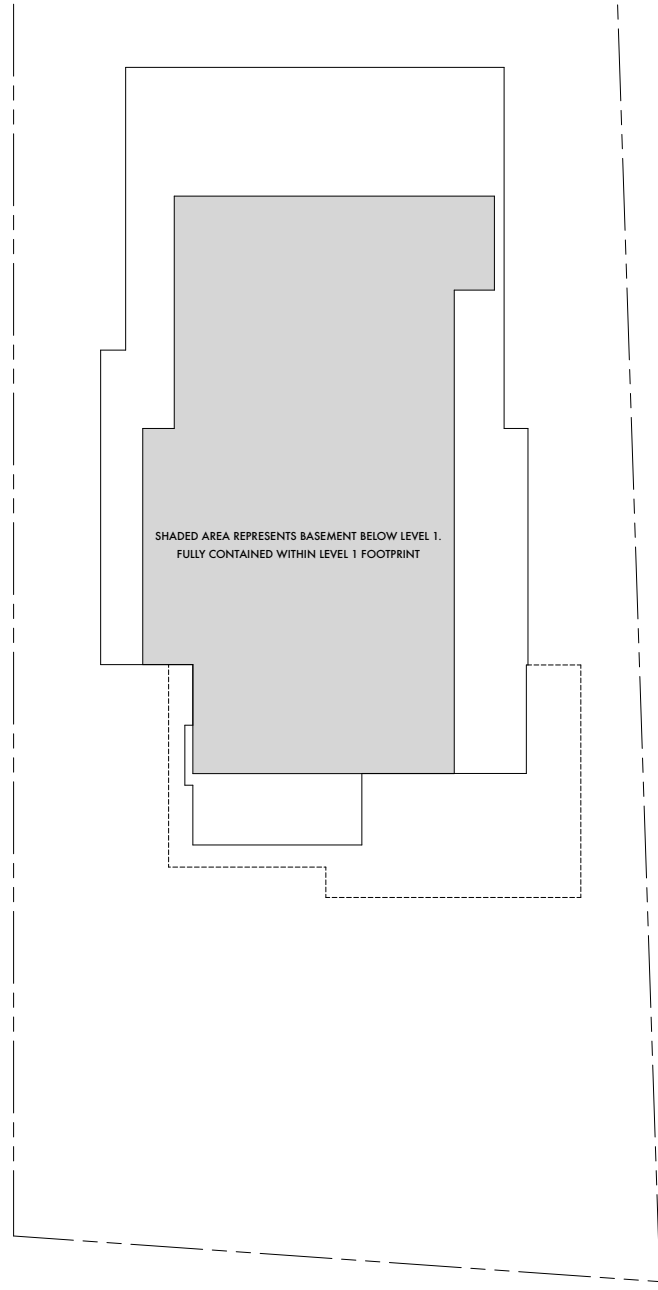


EXTERIOR ELEVATION @ SOUTH
SCALE: 1/8" = 1'-0"




BASEMENT BUILDING FOOTPRINT DIAGRAM
SCALE: 1/8" = 1'-0" **A1**

- GENERAL NOTES | DEMO PLAN**
1. Do not scale the drawings. If a specific dimension is not given, contract Designtrait for clarification.
 2. Dimensions are to face of frame or centerline of frame as noted.
 3. Keynotes located on this sheet are for this sheet only.
 4. Contractor shall exercise reasonable precaution in the protection of all existing finishes to remain and/or all existing substrates to receive new finish; Contractor shall: provide protective coverings and impact protection for all floor, partition, ceiling, window, glass, and all other existing finishes in the project area and for all finishes which may be subject to traffic or construction activity in adjacent areas; extend protection from building entry(ies) to project area(s).
 5. Patch and repair all finishes and materials that occur from the removal or demolition procedure.
 6. The Contractor shall remove from demolished walls or portions of walls all power circuits and switch legs back to first junction box. Remove any millwork or wall-mounted fixtures from walls indicated to be demolished and not otherwise shown. Any building fixtures removed from the Project and not disposed of shall be salvaged as directed by the Owner Representative. The Contractor shall take care not to unreasonable cause damage to the building fixtures.
 7. Contractor to remove at least one side of gyp at all existing walls for the installation new sound batt insulation.
 8. Contractor to remove ALL wall panelling from project. Replace with 5/8" Gyp Bd.
 9. Existing walls might carry or transfer roof and/or ceiling loads. Consult with a qualified structural engineer to verify load bearing status for all existing walls prior to any demolition work. Provide transfer beams or alternate structure if necessary. Provide temporary shoring where required.
 10. Contractor shall walk project site with Architect and Owner to review extent of demolition and identify any additional components that need to be removed in order to provide proposed new construction or that the Owner wishes to be removed as part of the scope of project.


KEYNOTES - DEMO PLAN	
1	Shaded area shown as extent of first 15'-0" of the structure to remain. Patch and repair all exterior walls, roofs and slab to remain within area, U.N.O.
2	Existing glazing to remain. Repair/replace as needed.
3	Existing front porch to remain.
4	Interior partitions to be demo'd.
5	Demo all exterior & interior walls, slabs, roof, plumbing fixtures & appliances outside of first 15'-0" of existing structure.
6	Demo existing wood rear patio.
7	Demo existing wood patio stairs.

WALL LEGEND	
	EXISTING WALL TO REMAIN
	NEW WALL
	DEMO EXISTING WALL

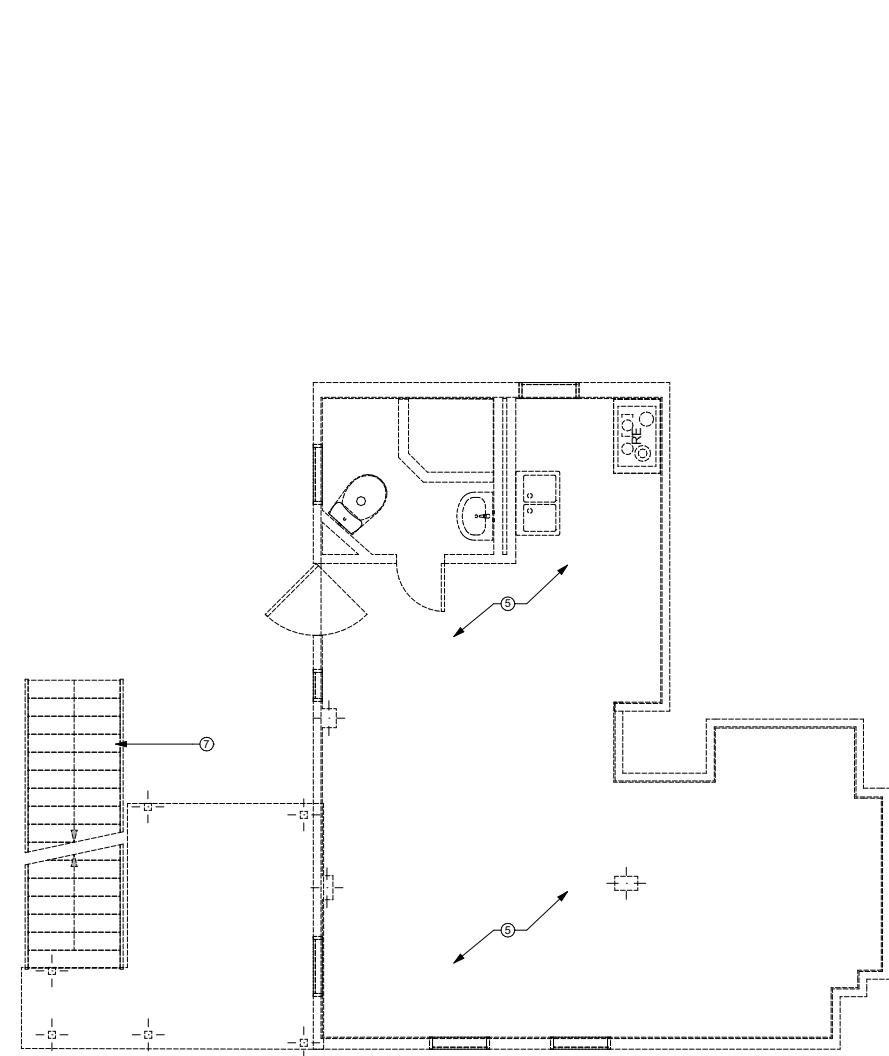

DEMO PLAN - MAIN HOUSE - BASEMENT LEVEL

SCALE: 1/4" = 1'-0"

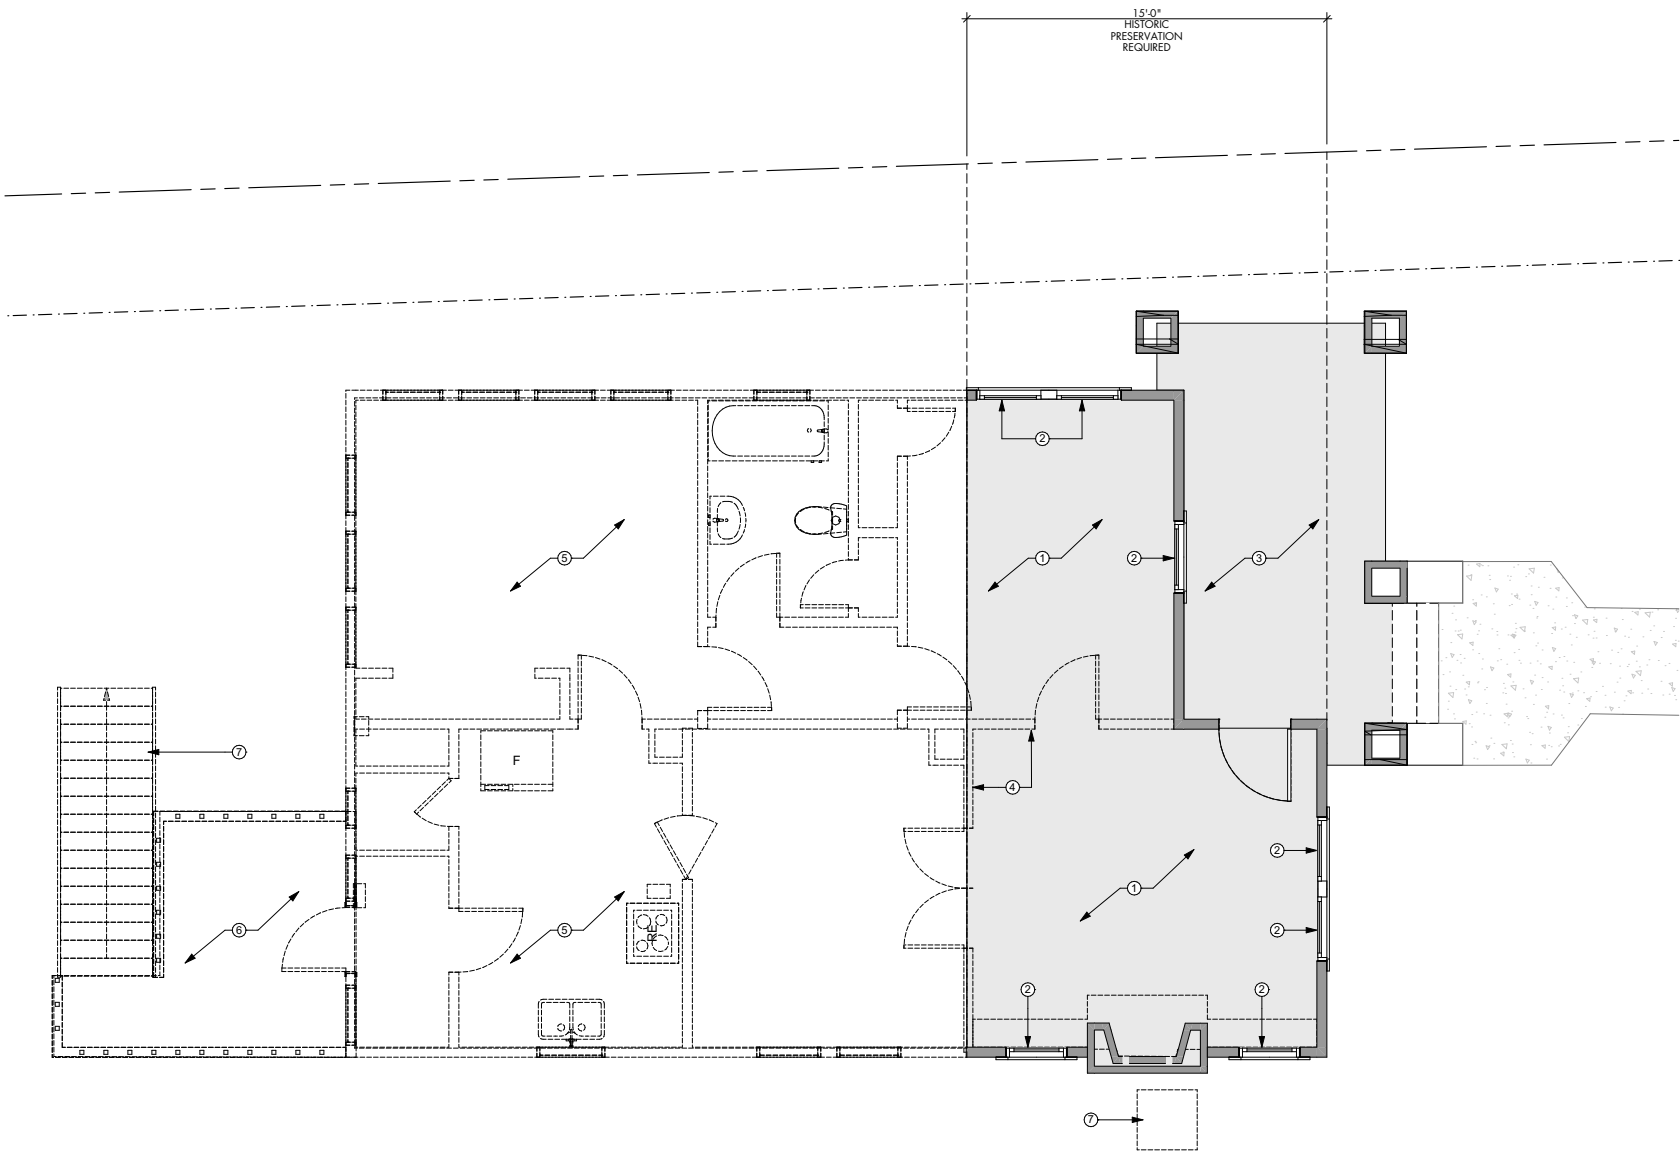

DEMO PLAN - MAIN HOUSE - LEVEL 1

SCALE: 1/4" = 1'-0"



DEMO PLAN

- GENERAL NOTES | FLOOR PLAN
1.

Do not scale the drawings. If a specific dimension is not given, contract Designtrait for clarification.
2.

Dimensions are to face of frame or centerline of frame as noted.
3.

Keynotes located on this sheet are for this sheet only.
4.

Provide tempered glazing as required by local codes.
5.

Provide submittals and shop drawings showing number of windows, locations of tempered glazing, finishes, etc.
6.


Window and door types indicate rough sizes only. GC shall field verify the appropriate glazing and leaf sizes in the field prior to ordering. For any questions, contact Designtrait for clarification.
7.

Patch and repair all finishes and materials that occur from the removal or demolition procedure.
8.

Contractor to remove at least one side of gyp at all existing walls for the installation new sound batt insulation.
9.

Existing walls might carry or transfer roof and/or ceiling loads. Consult with a qualified structural engineer to verify load bearing status for all existing walls prior to any demolition work. Provide transfer beams or alternate structure if necessary. Provide temporary shoring where required.
10.

Contractor shall walk project site with Architect and Owner to review extent of demolition and identify any additional components that need to be removed in order to provide proposed new construction or that the Owner wishes to be removed as part of the scope of project.

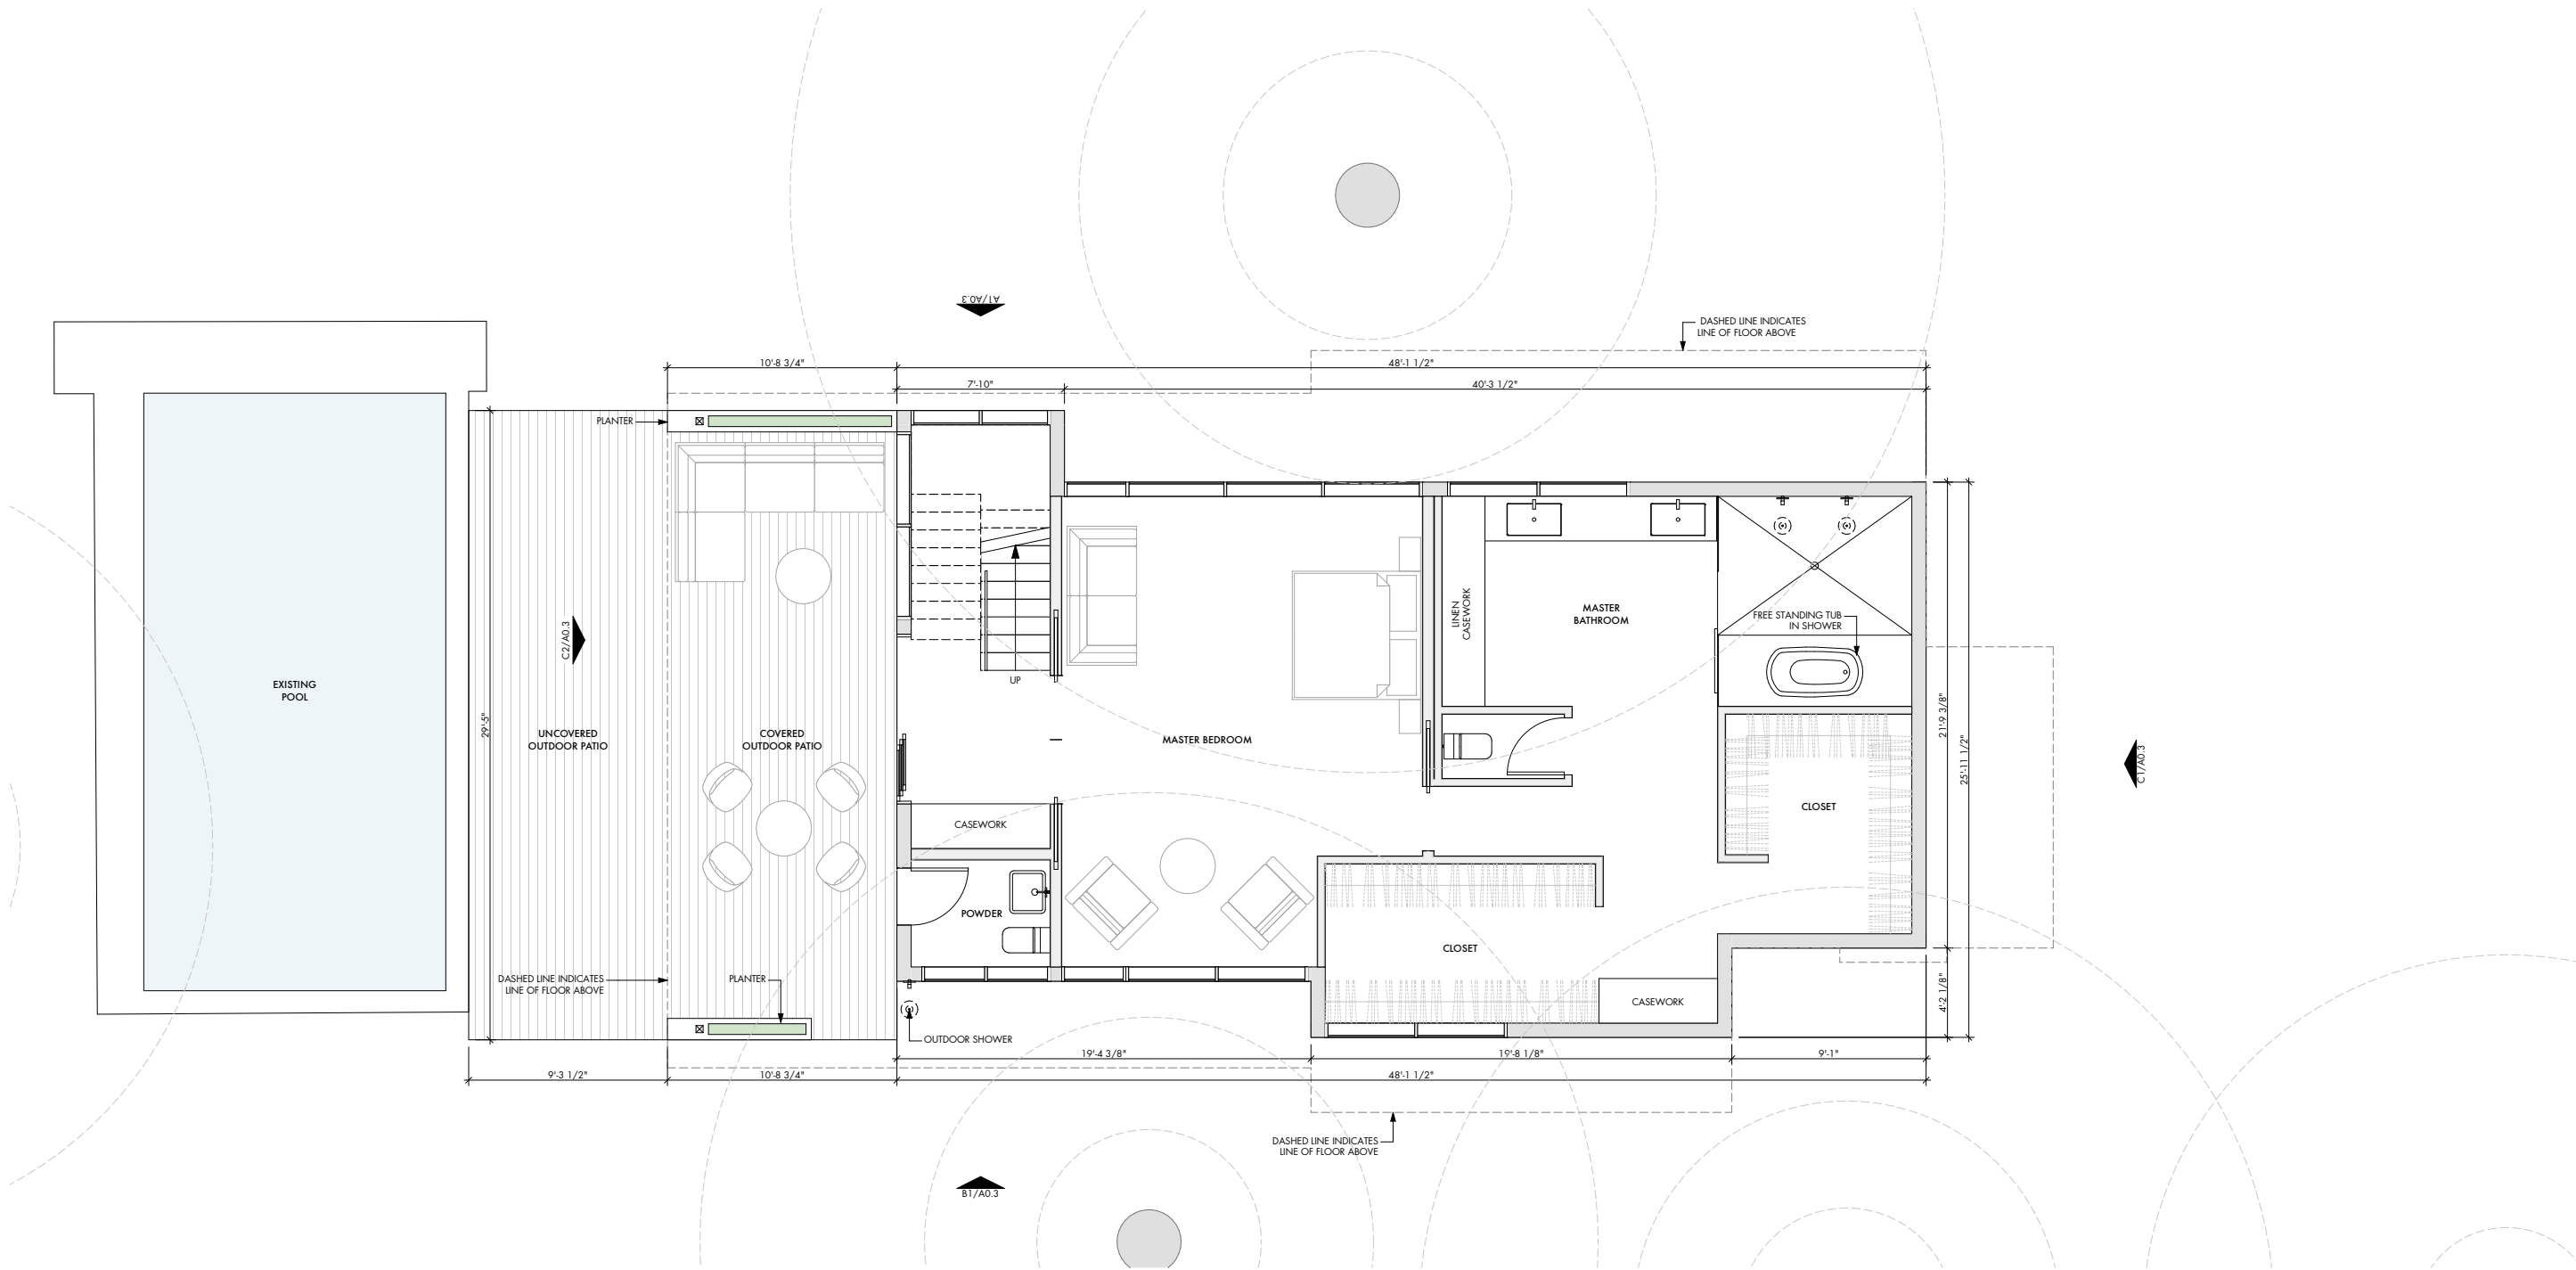

FLOOR PLAN - BASEMENT LEVEL

SCALE: 1/4" = 1'-0"

- GENERAL NOTES | FLOOR PLAN
1.

Do not scale the drawings. If a specific dimension is not given, contact Designtrait for clarification.
2.

Dimensions are to face of frame or centerline of frame as noted.
3.

Keynotes located on this sheet are for this sheet only.
4.

Provide tempered glazing as required by local codes.
5.

Provide submittals and shop drawings showing number of windows, locations of tempered glazing, finishes, etc.
6.


Window and door types indicate rough sizes only. GC shall field verify the appropriate glazing and leaf sizes in the field prior to ordering. For any questions, contact Designtrait for clarification.
7.

Patch and repair all finishes and materials that occur from the removal or demolition procedure.
8.

Contractor to remove at least one side of gyp at all existing walls for the installation new sound batt insulation.
9.

Existing walls might carry or transfer roof and/or ceiling loads. Consult with a qualified structural engineer to verify load bearing status for all existing walls prior to any demolition work. Provide transfer beams or alternate structure if necessary. Provide temporary shoring where required.
10.

Contractor shall walk project site with Architect and Owner to review extent of demolition and identify any additional components that need to be removed in order to provide proposed new construction or that the Owner wishes to be removed as part of the scope of project.

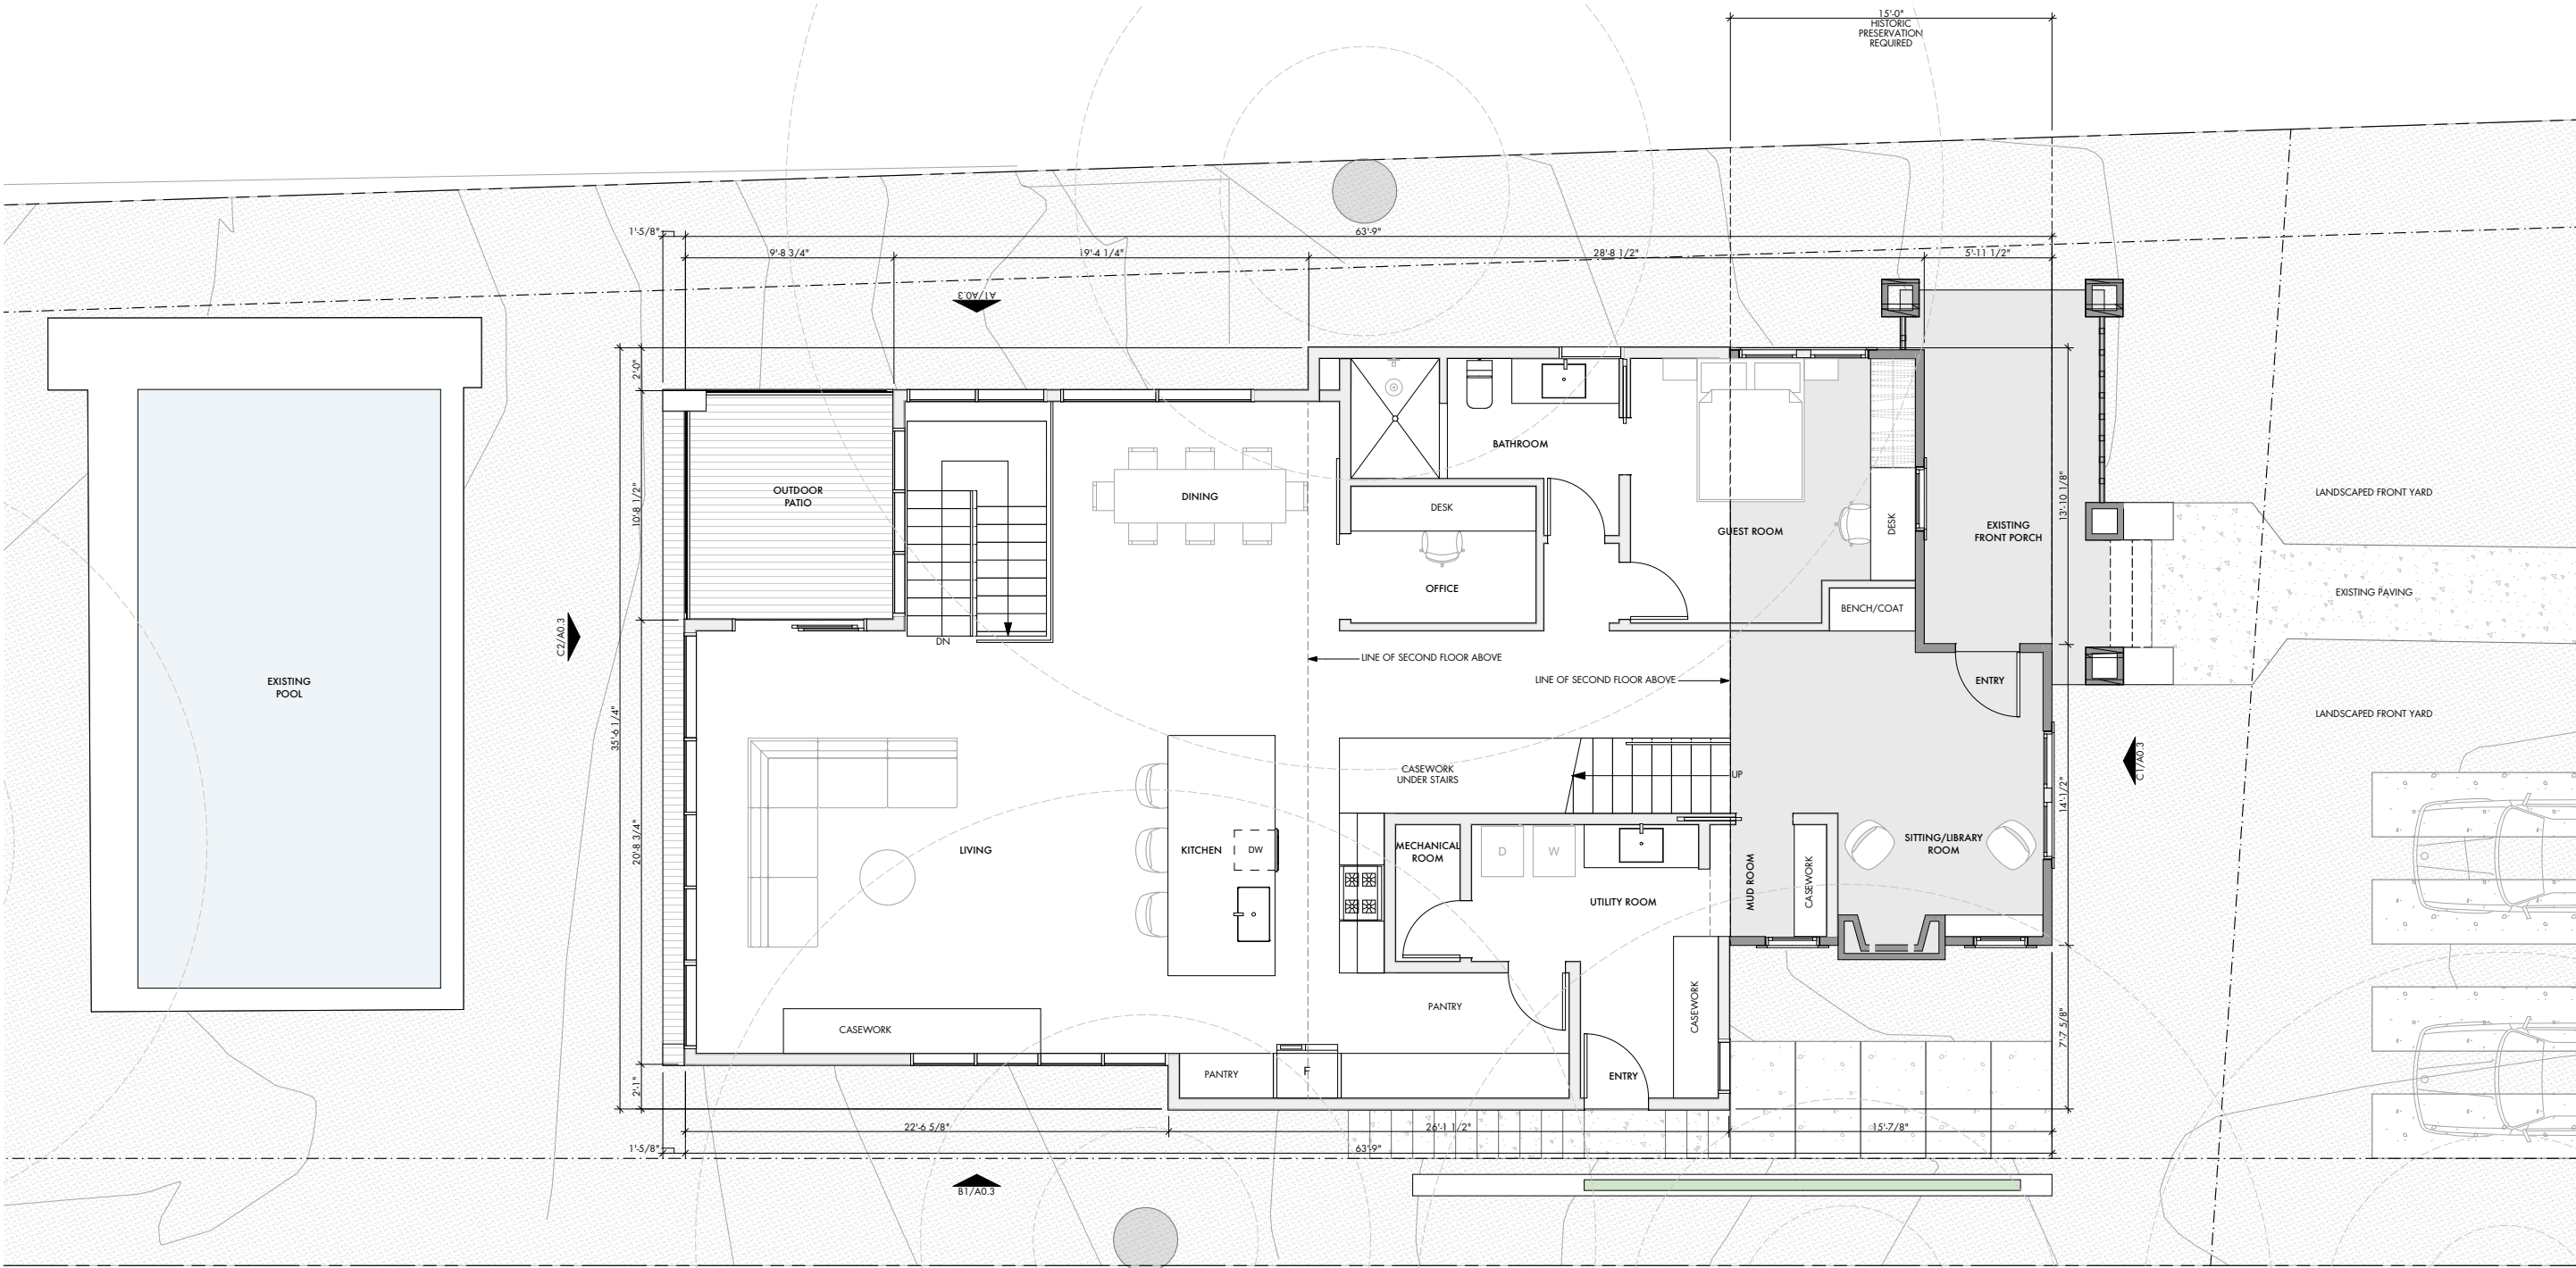

FLOOR PLAN - LEVEL 1

SCALE: 1/4" = 1'-0"

- GENERAL NOTES | FLOOR PLAN
1.

Do not scale the drawings. If a specific dimension is not given, contact Designtrait for clarification.
2.

Dimensions are to face of frame or centerline of frame as noted.
3.

Keynotes located on this sheet are for this sheet only.
4.

Provide tempered glazing as required by local codes.
5.

Provide submittals and shop drawings showing number of windows, locations of tempered glazing, finishes, etc.
6.


Window and door types indicate rough sizes only. GC shall field verify the appropriate glazing and leaf sizes in the field prior to ordering. For any questions, contact Designtrait for clarification.
7.

Patch and repair all finishes and materials that occur from the removal or demolition procedure.
8.

Contractor to remove at least one side of gyp at all existing walls for the installation new sound batt insulation.
9.

Existing walls might carry or transfer roof and/or ceiling loads. Consult with a qualified structural engineer to verify load bearing status for all existing walls prior to any demolition work. Provide transfer beams or alternate structure if necessary. Provide temporary shoring where required.
10.


Contractor shall walk project site with Architect and Owner to review extent of demolition and identify any additional components that need to be removed in order to provide proposed new construction or that the Owner wishes to be removed as part of the scope of project.

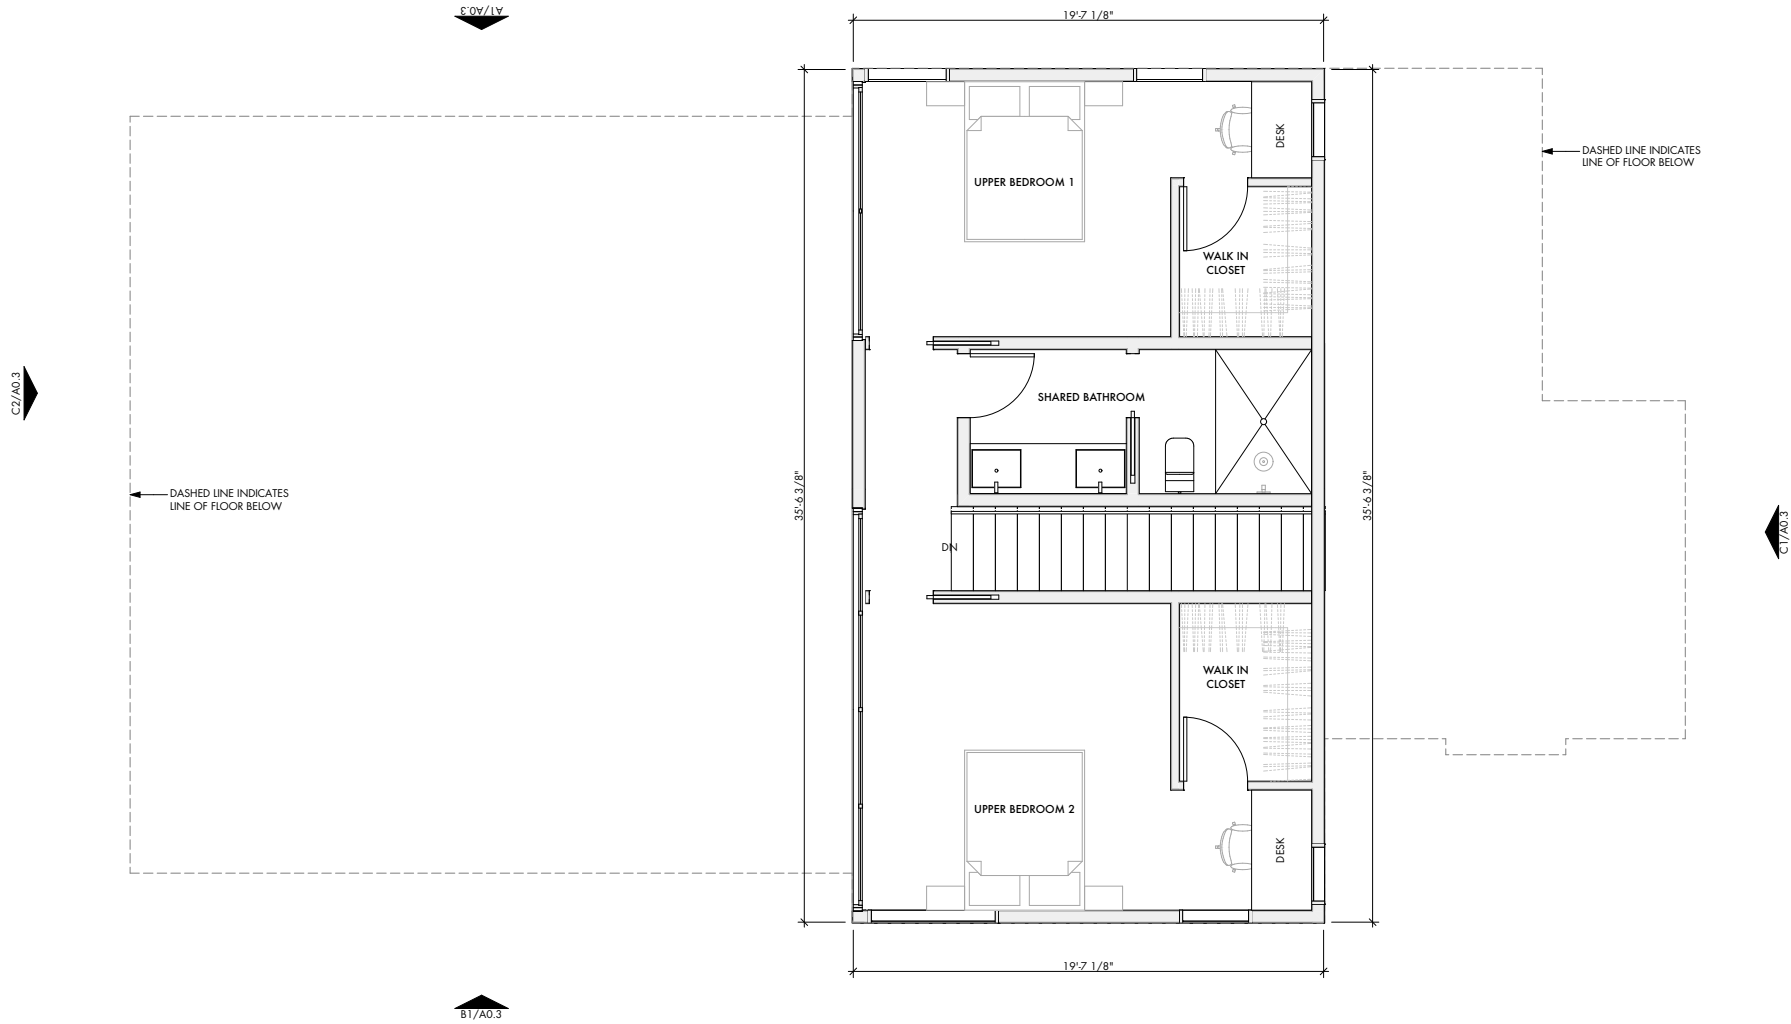

FLOOR PLAN - LEVEL 2


SCALE: 1/4" = 1'-0"

KEYNOTES - EXTERIOR ELEVATIONS	
1	First 15'-0" of existing metal roof @ existing structure to remain, clean/repair as needed.
2	First 15'-0" of existing fascia @ existing structure to remain, clean/repair as needed.
3	First 15'-0" of existing masonry columns, chimney & stairs @ existing structure to remain, patch/repair as needed.
4	First 15'-0" of existing siding @ existing structure to remain, patch/repair as needed. Finish as directed, coordinate & verify with Designtrait.
5	New standing seam metal roof, match slope to existing roof.
6	Smooth stucco finish, paint and finish as directed by Designtrait.
7	Exterior wood clad.
8	Painted metal railing.
9	Painted structural column.
10	Board formed concrete walls, finish as directed.
11	Wood privacy fence.
12	Painted structural beam with wood joist infill.
13	Exterior ship lap siding.

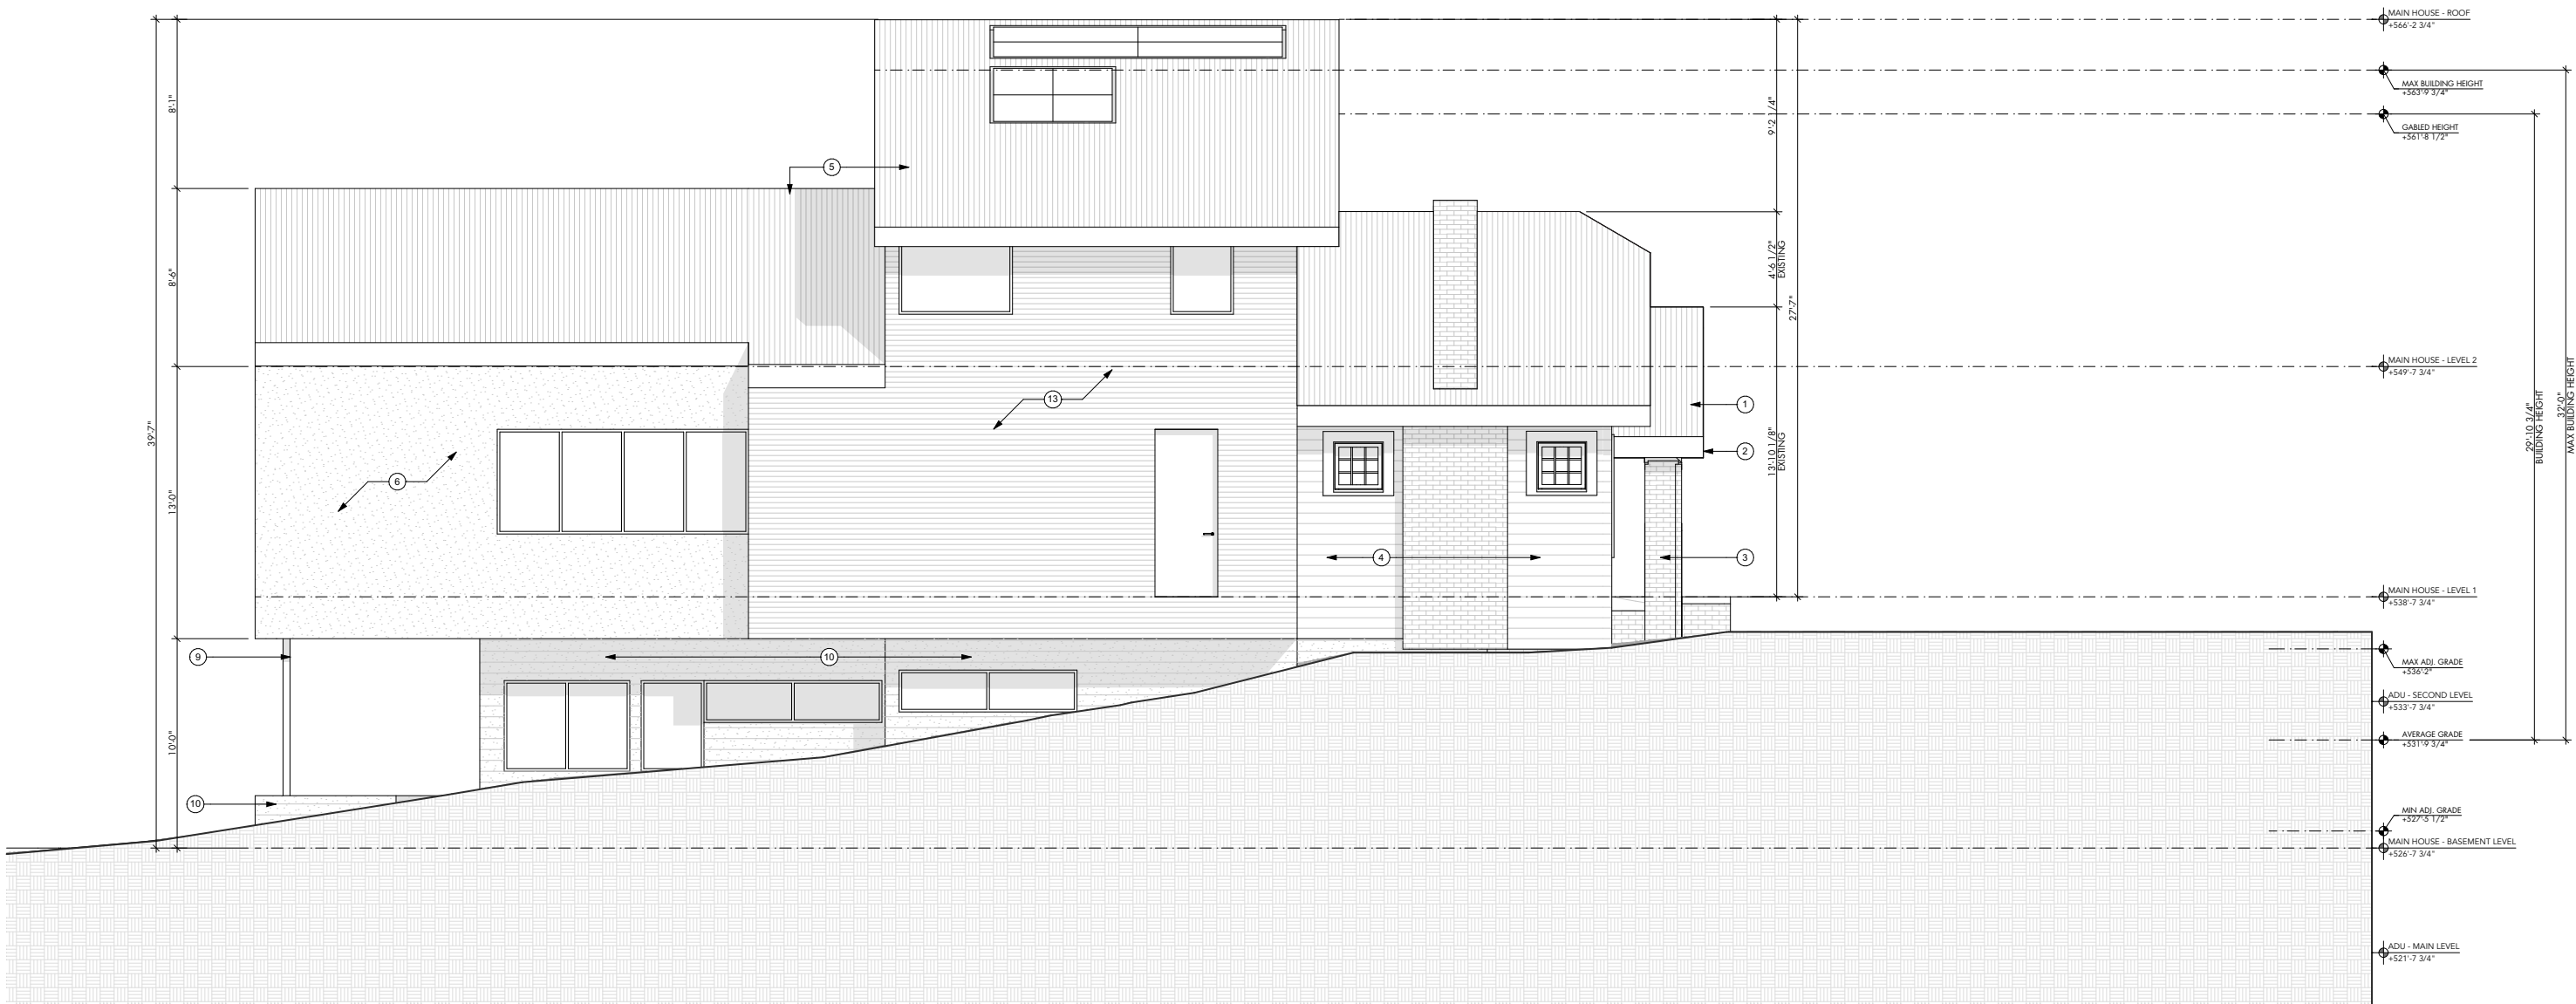


MAIN HOUSE - NORTH EXTERIOR ELEVATION **A1**
SCALE: 1/4" = 1'-0"

KEYNOTES - EXTERIOR ELEVATIONS	
1	First 15'-0" of existing metal roof @ existing structure to remain, clean/repair as needed.
2	First 15'-0" of existing fascia @ existing structure to remain, clean/repair as needed.
3	First 15'-0" of existing masonry columns, chimney & stairs @ existing structure to remain, patch/repair as needed.
4	First 15'-0" of existing siding @ existing structure to remain, patch/repair as needed. Finish as directed, coordinate & verify with Designtrait.
5	New standing seam metal roof, match slope to existing roof.
6	Smooth stucco finish, paint and finish as directed by Designtrait.
7	Exterior wood clad.
8	Painted metal railing.
9	Painted structural column.
10	Board formed concrete walls, finish as directed.
11	Wood privacy fence.
12	Painted structural beam with wood joist infill.
13	Exterior ship lap siding.

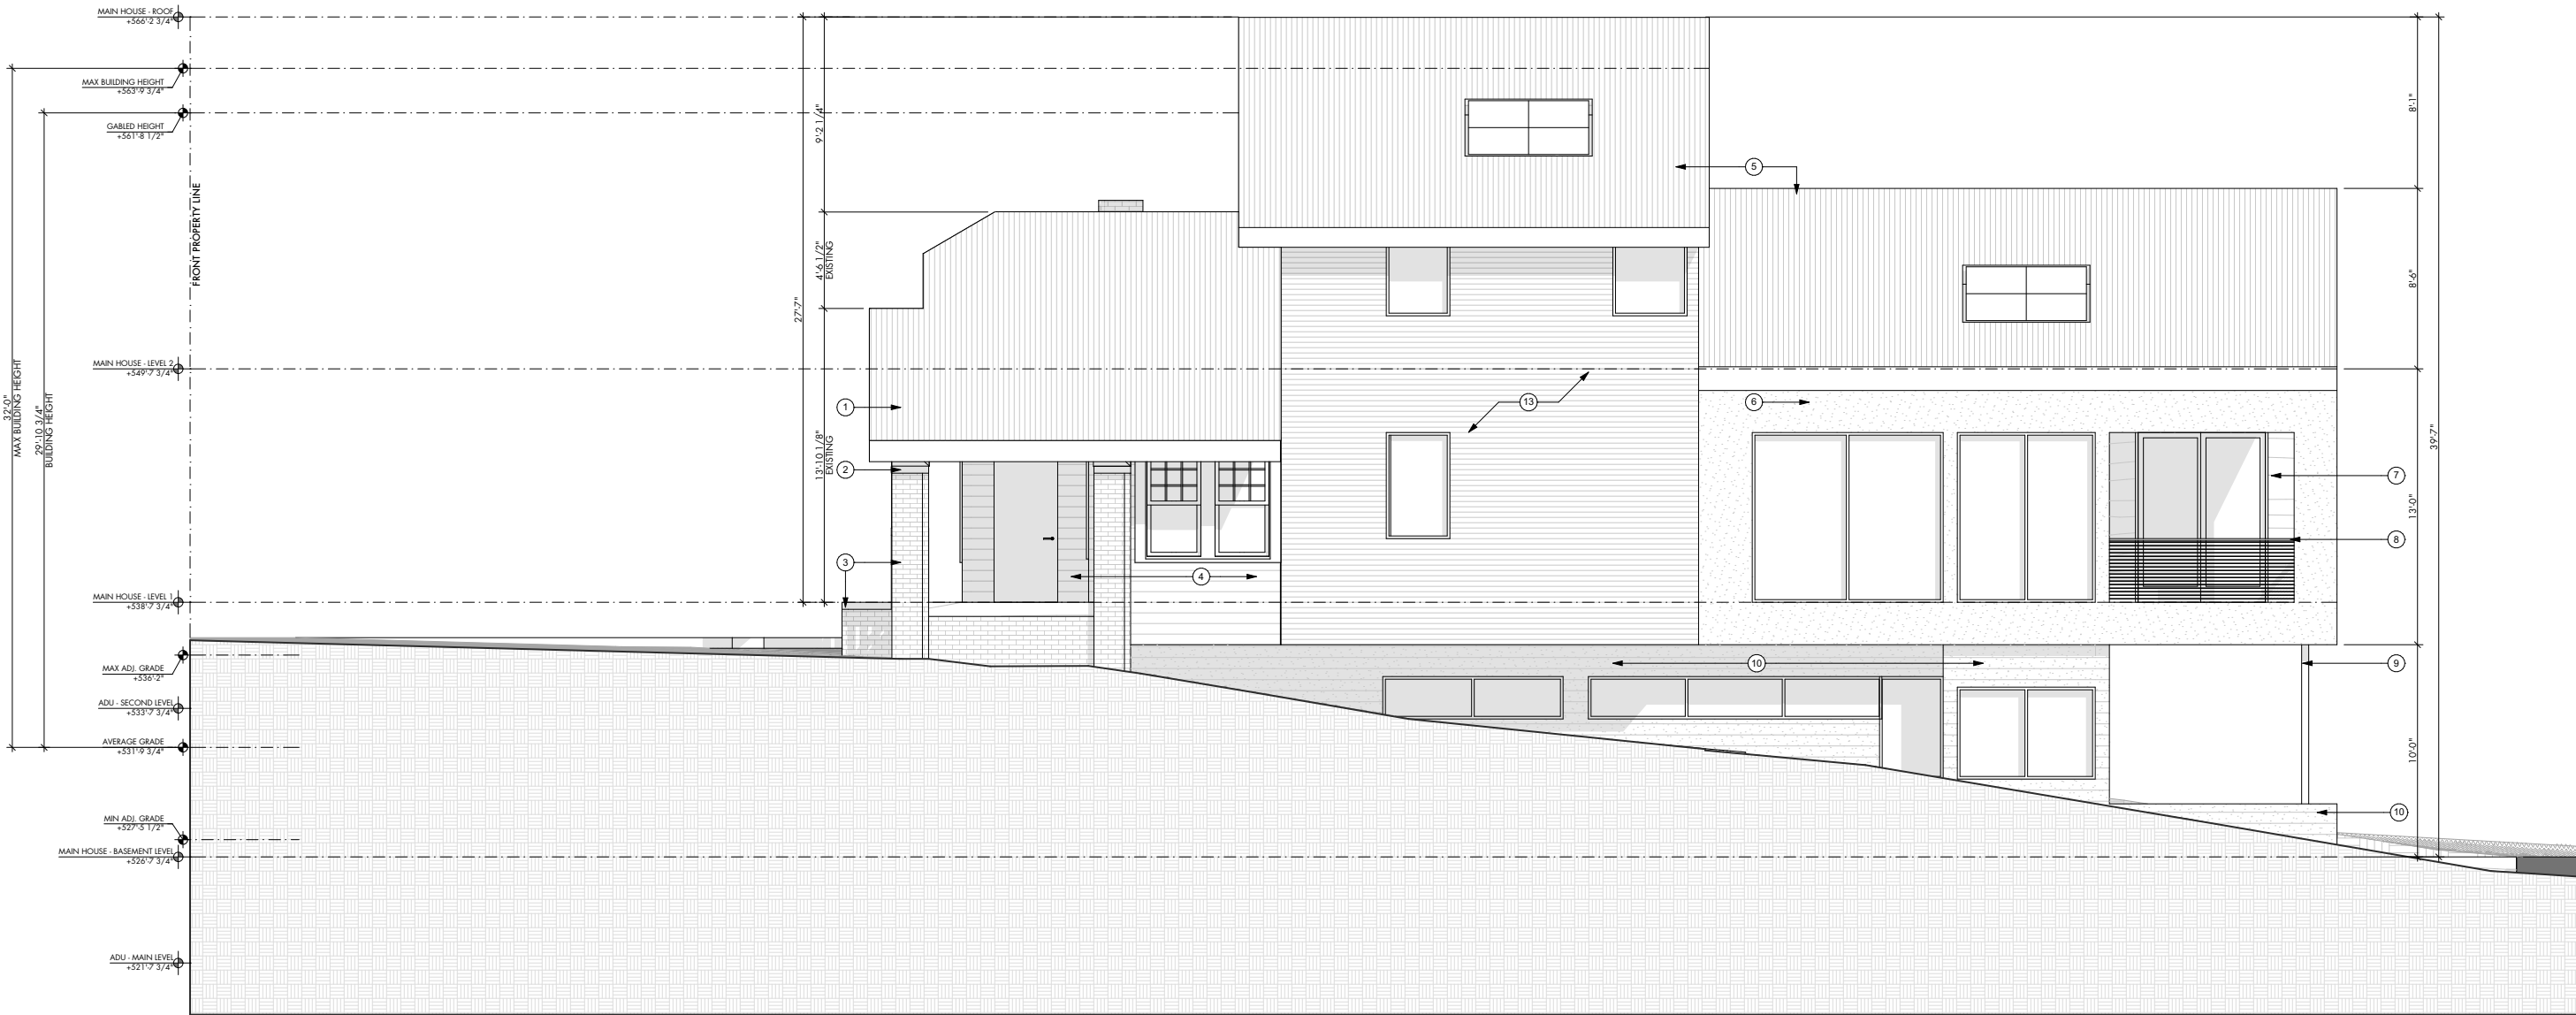


MAIN HOUSE - SOUTH EXTERIOR ELEVATION **A1**
SCALE: 1/4" = 1'-0"

KEYNOTES - EXTERIOR ELEVATIONS	
1	First 15'-0" of existing metal roof @ existing structure to remain, clean/repair as needed.
2	First 15'-0" of existing fascia @ existing structure to remain, clean/repair as needed.
3	First 15'-0" of existing masonry columns, chimney & stairs @ existing structure to remain, patch/repair as needed.
4	First 15'-0" of existing siding @ existing structure to remain, patch/repair as needed. Finish as directed, coordinate & verify with Designtrait.
5	New standing seam metal roof, match slope to existing roof.
6	Smooth stucco finish, paint and finish as directed by Designtrait.
7	Exterior wood clad.
8	Painted metal railing.
9	Painted structural column.
10	Board formed concrete walls, finish as directed.
11	Wood privacy fence.
12	Painted structural beam with wood joint infill.
13	Exterior ship lap siding.

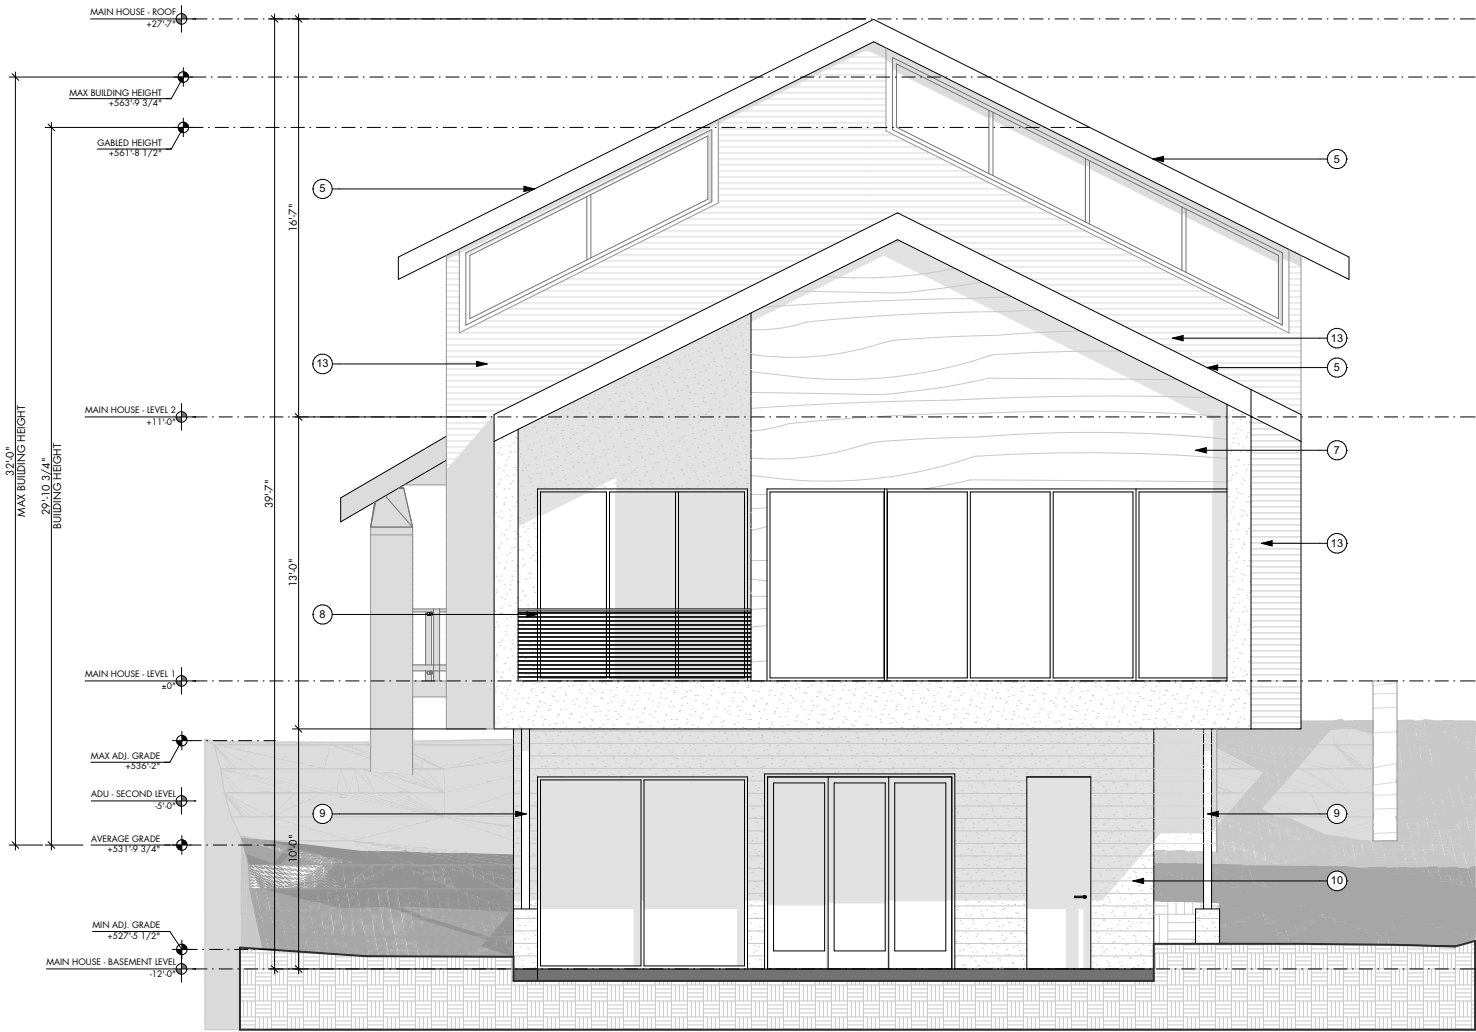


MAIN HOUSE - EAST EXTERIOR ELEVATION A3
SCALE: 1/4" = 1'-0"

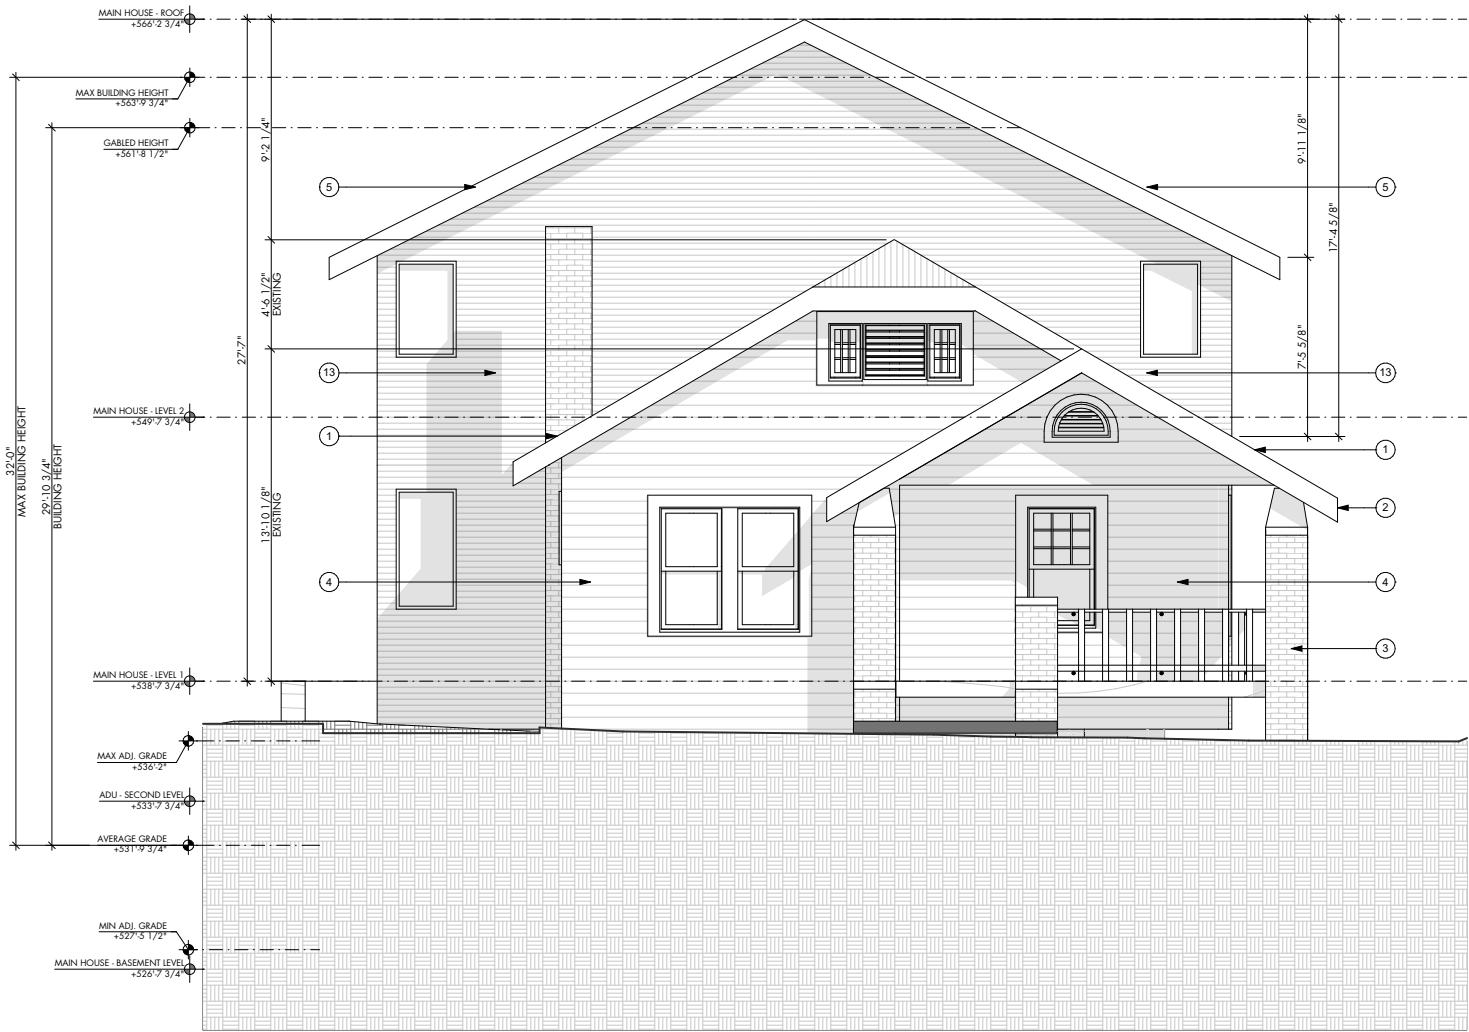


MAIN HOUSE - WEST EXTERIOR ELEVATION A1
SCALE: 1/4" = 1'-0"

MAIN HOUSE - EAST & WEST EXTERIOR ELEVATIONS

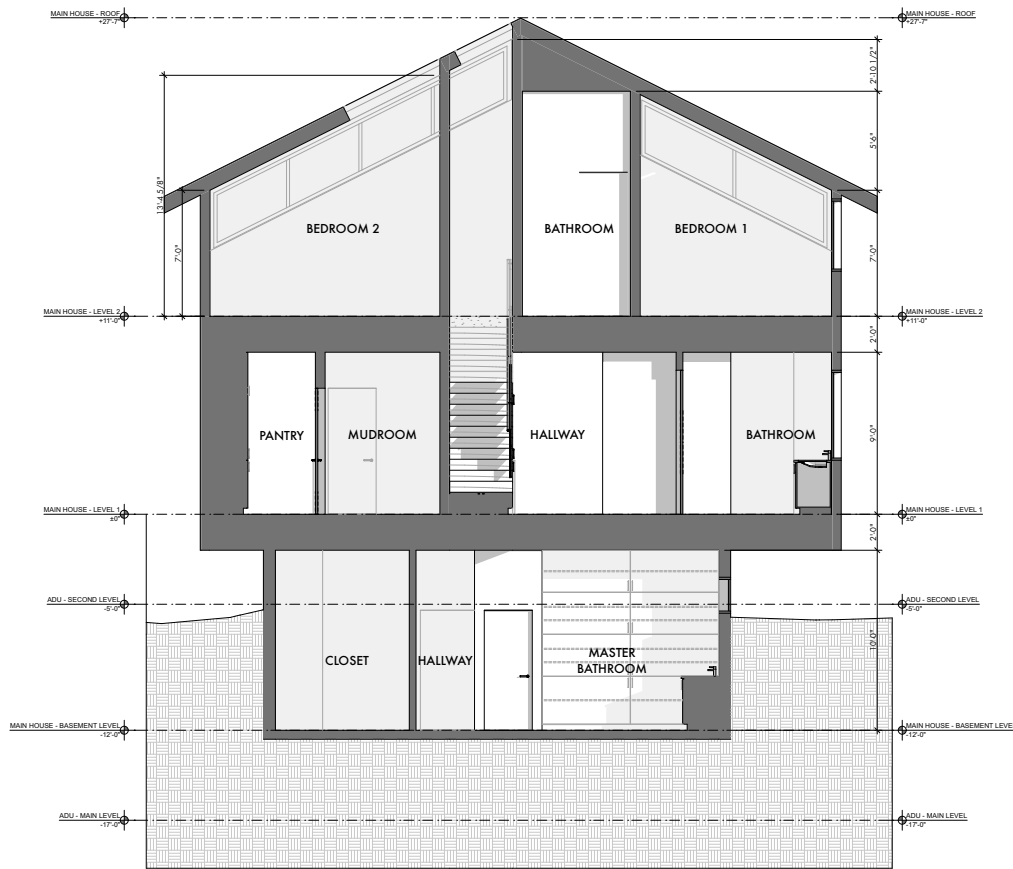


CROSS SECTION THROUGH MAIN HOUSE

SCALE: 3/16" = 1'-0"

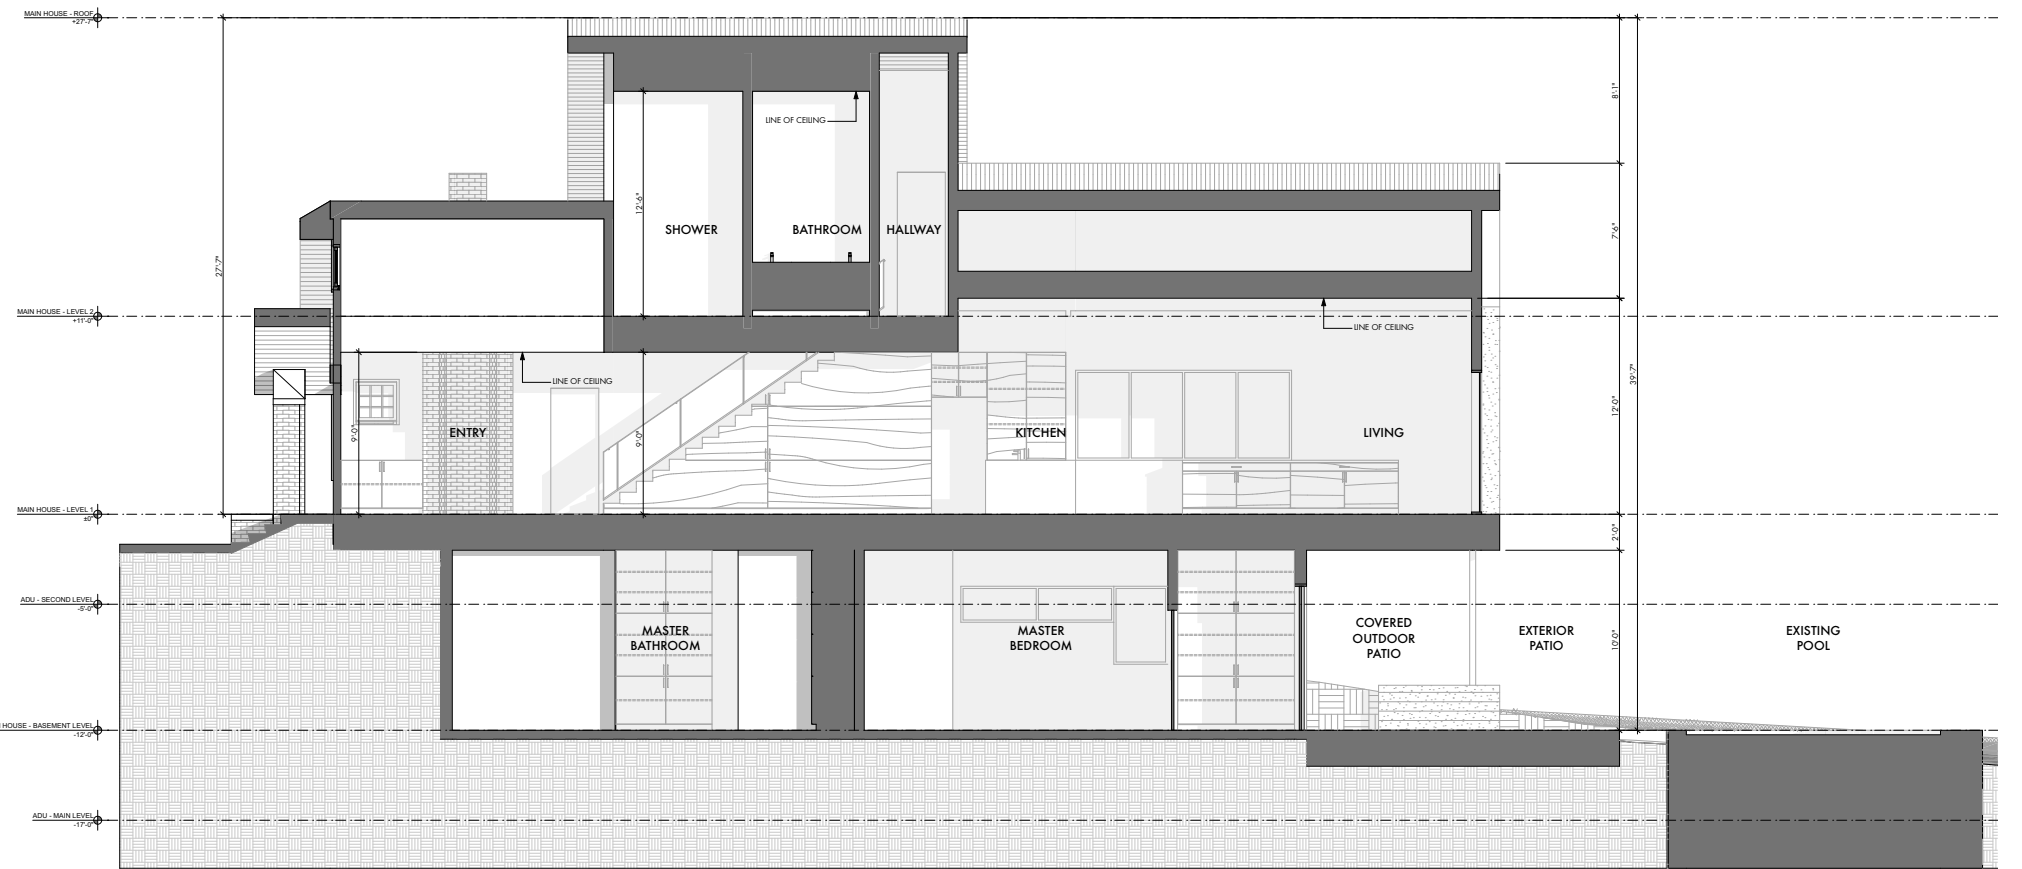

LONGITUDINAL SECTION THROUGH MAIN HOUSE

SCALE: 3/16" = 1'-0"

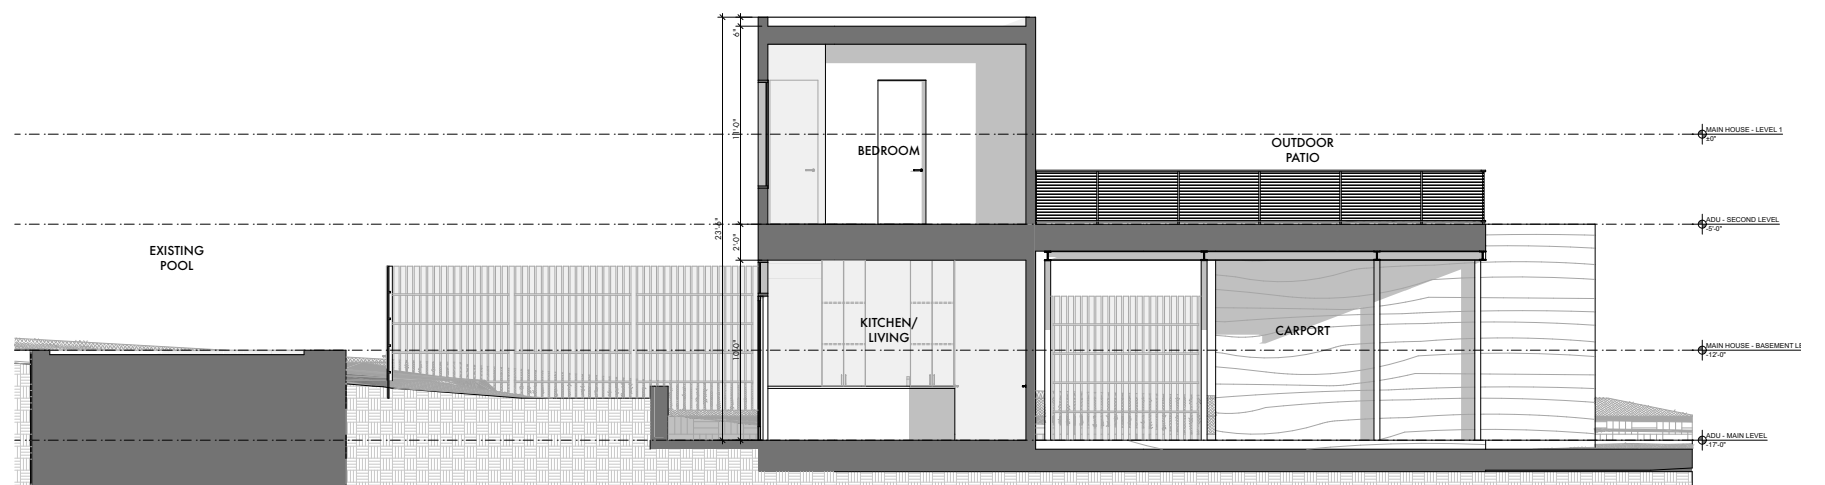

CROSS SECTION THROUGH ADU

SCALE: 3/16" = 1'-0"



MAIN HOME - FRONT PERSPECTIVE

WEST LYNN SPEC
613 W LYNN ST, AUSTIN TX 78703
19 JULY 2021



MAIN HOME - SIDE PERSPECTIVE



MAIN HOME - SIDE PERSPECTIVE



MAIN HOME - REAR PERSPECTIVE



MAIN HOME - REAR PERSPECTIVE

WEST LYNN SPEC
613 W LYNN ST, AUSTIN TX 78703
19 JULY 2021



MAIN HOME - REAR PERSPECTIVE

- GENERAL NOTES | FLOOR PLAN
1.

Do not scale the drawings. If a specific dimension is not given, contact Designtrait for clarification.
2.

Dimensions are to face of frame or centerline of frame as noted.
3.

Keynotes located on this sheet are for this sheet only.
4.

Provide tempered glazing as required by local codes.
5.

Provide submittals and shop drawings showing number of windows, locations of tempered glazing, finishes, etc.
6.


Window and door types indicate rough sizes only. GC shall field verify the appropriate glazing and leaf sizes in the field prior to ordering. For any questions, contact Designtrait for clarification.
7.

Patch and repair all finishes and materials that occur from the removal or demolition procedure.
8.

Contractor to remove at least one side of gyp at all existing walls for the installation new sound batt insulation.
9.


Existing walls might carry or transfer roof and/or ceiling loads. Consult with a qualified structural engineer to verify load bearing status for all existing walls prior to any demolition work. Provide transfer beams or alternate structure if necessary. Provide temporary shoring where required.
10.

Contractor shall walk project site with Architect and Owner to review extent of demolition and identify any additional components that need to be removed in order to provide proposed new construction or that the Owner wishes to be removed as part of the scope of project.

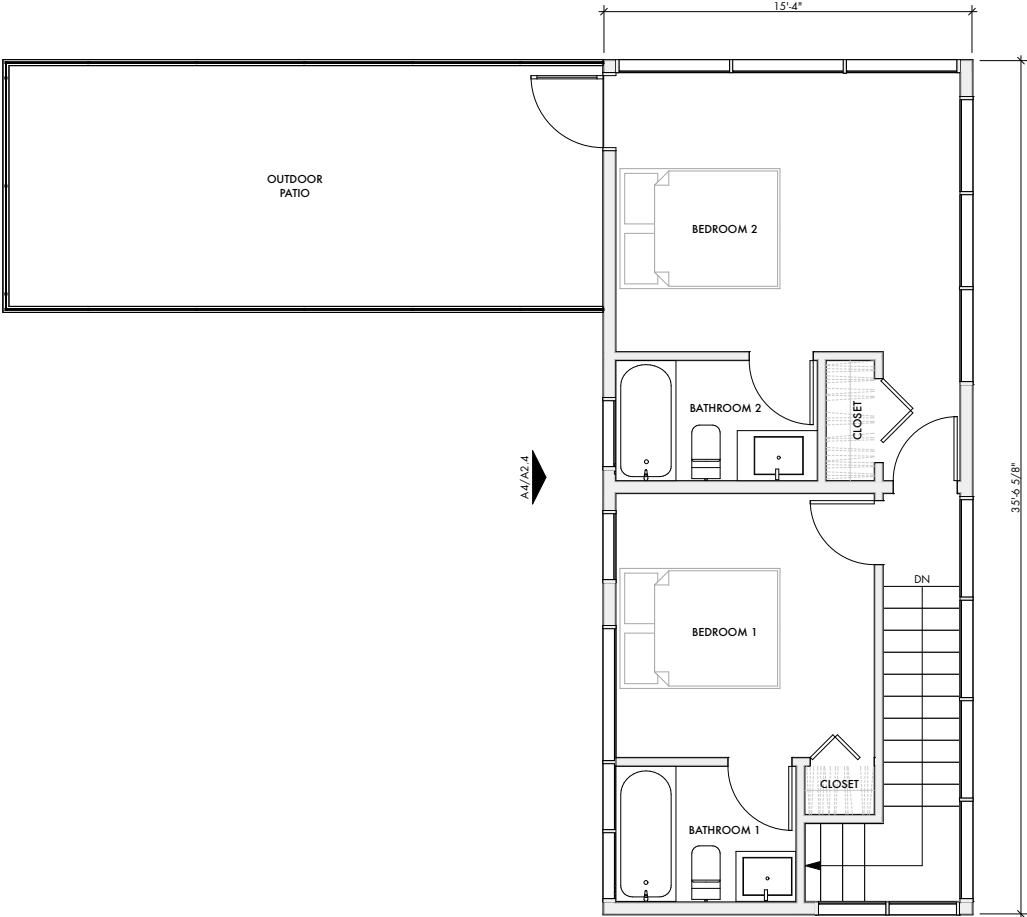

ADU FLOOR PLAN - LEVEL 2


SCALE: 1/4" = 1'-0"

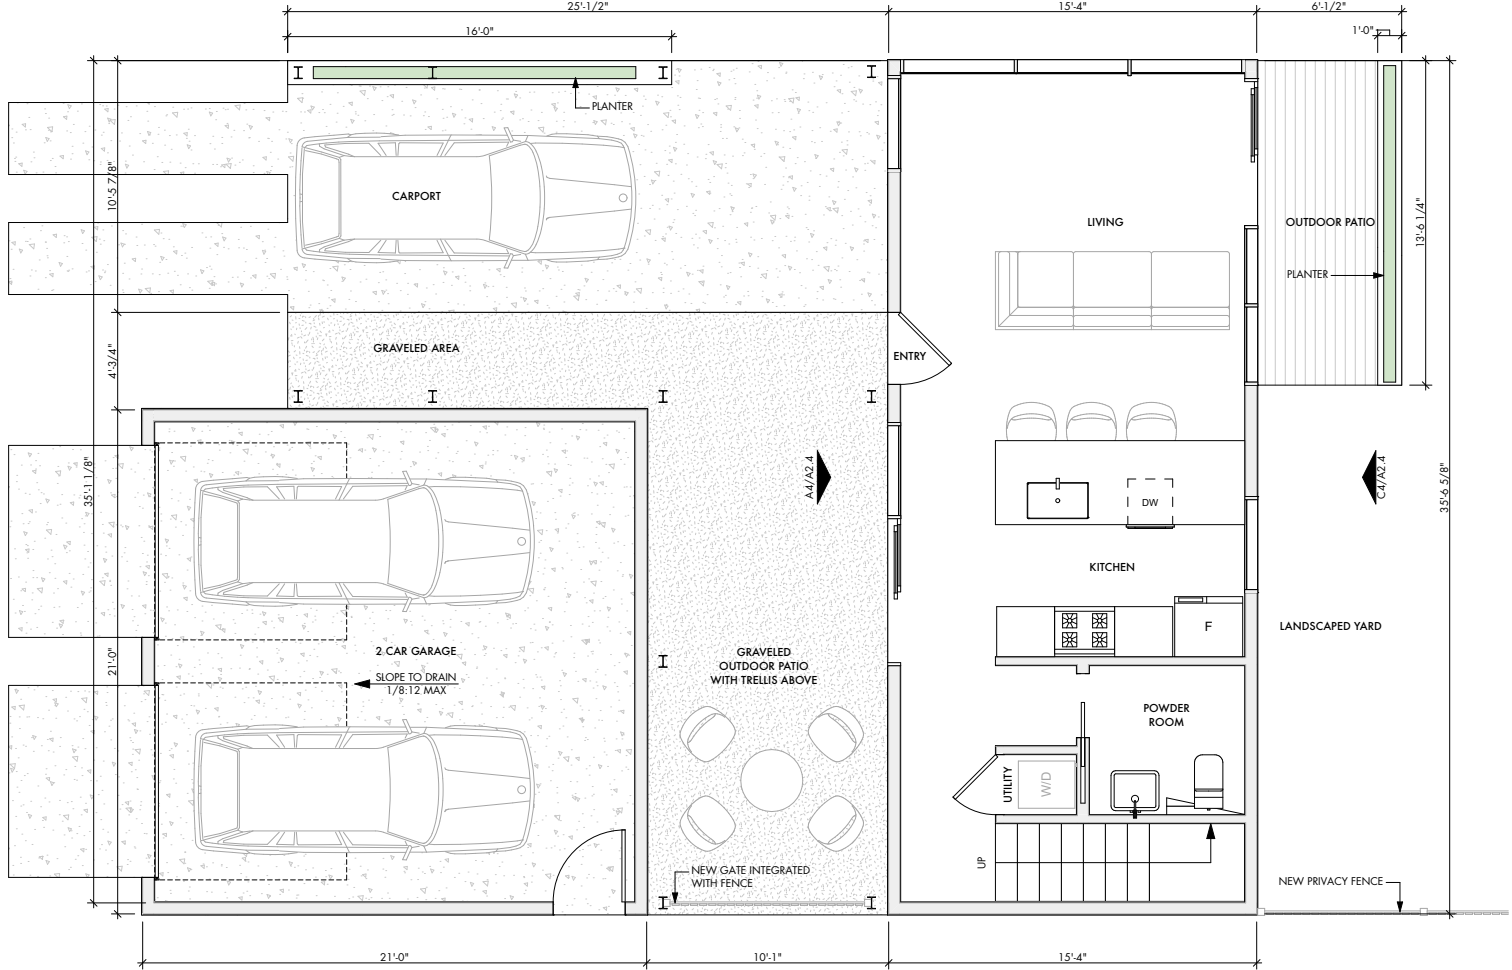

ADU FLOOR PLAN - LEVEL 1


SCALE: 1/4" = 1'-0"

KEYNOTES - EXTERIOR ELEVATIONS	
1	First 15'-0" of existing metal roof @ existing structure to remain, clean/repair as needed.
2	First 15'-0" of existing fascia @ existing structure to remain, clean/repair as needed.
3	First 15'-0" of existing masonry columns, chimney & stairs @ existing structure to remain, patch/repair as needed.
4	First 15'-0" of existing siding @ existing structure to remain, patch/repair as needed. Finish as directed, coordinate & verify with Designtrait.
5	New standing seam metal roof, match slope to existing roof.
6	Smooth stucco finish, paint and finish as directed by Designtrait.
7	Exterior wood clad.
8	Painted metal railing.
9	Painted structural column.
10	Board formed concrete walls, finish as directed.
11	Wood privacy fence.
12	Painted structural beam with wood joint infill.
13	Exterior ship lap siding.

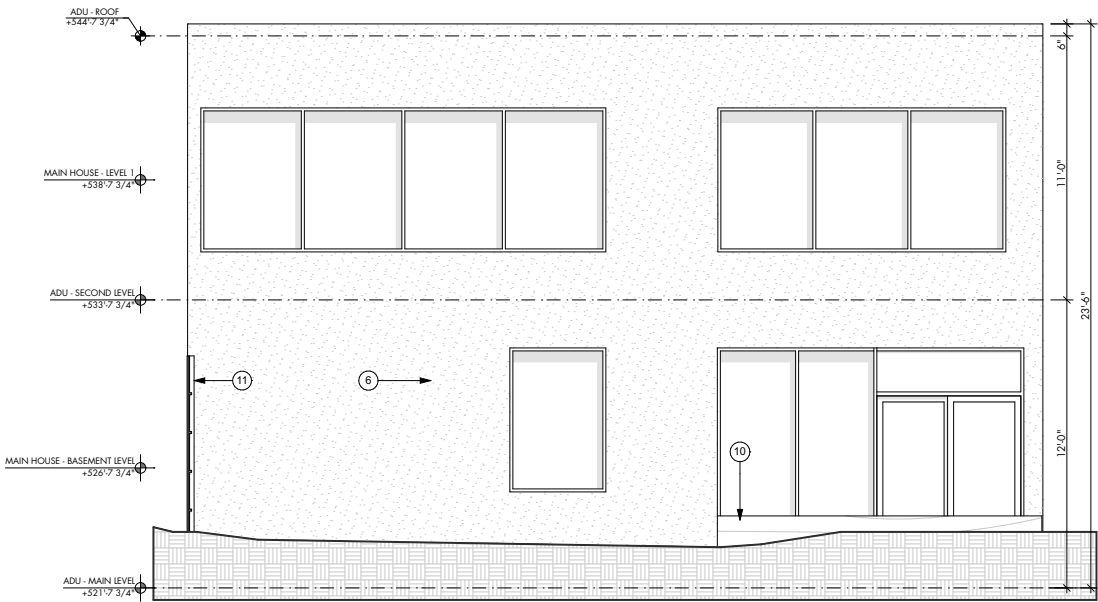


ADU - WEST ELEVATION

SCALE: 1/4" = 1'-0"

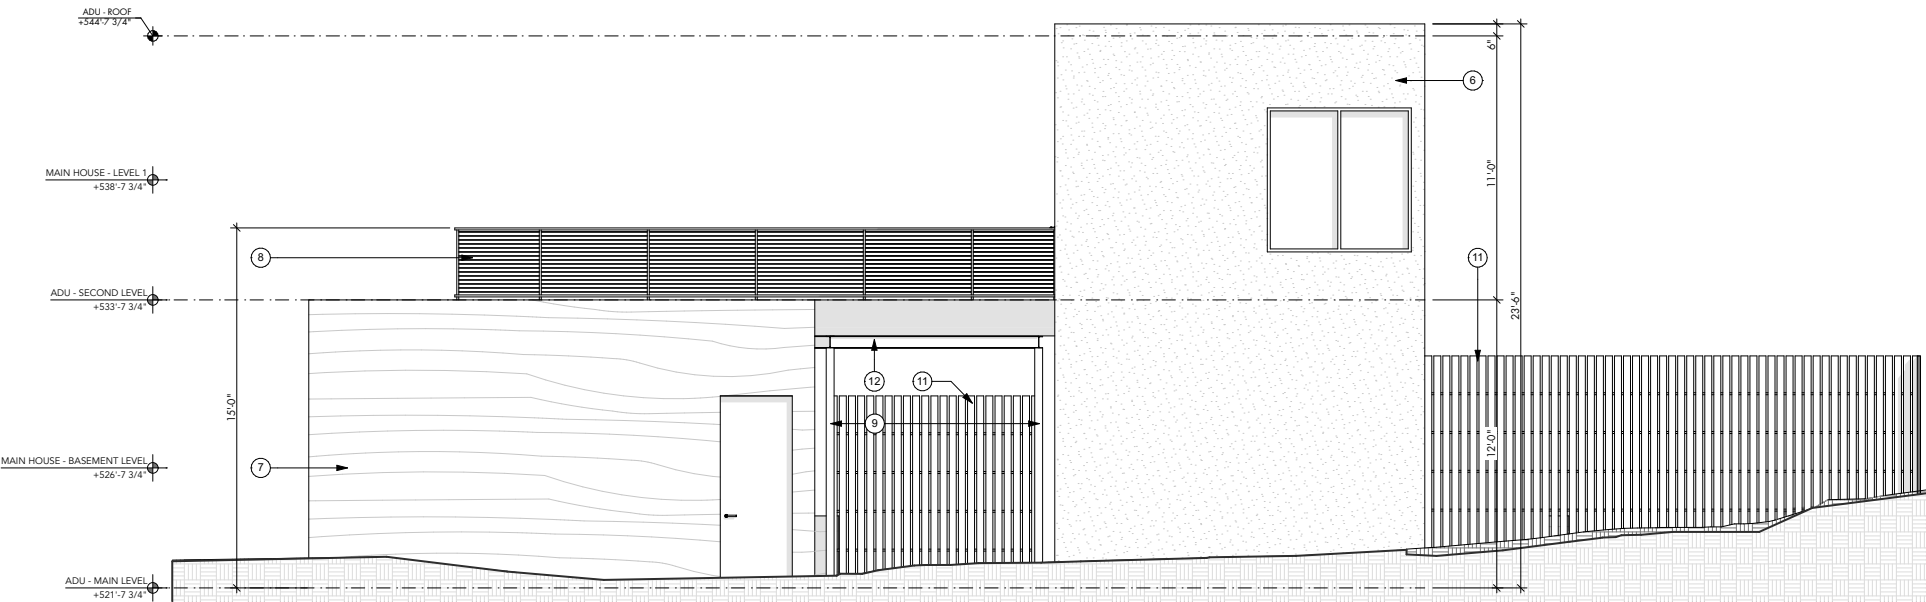


ADU - NORTH ELEVATION

SCALE: 1/4" = 1'-0"

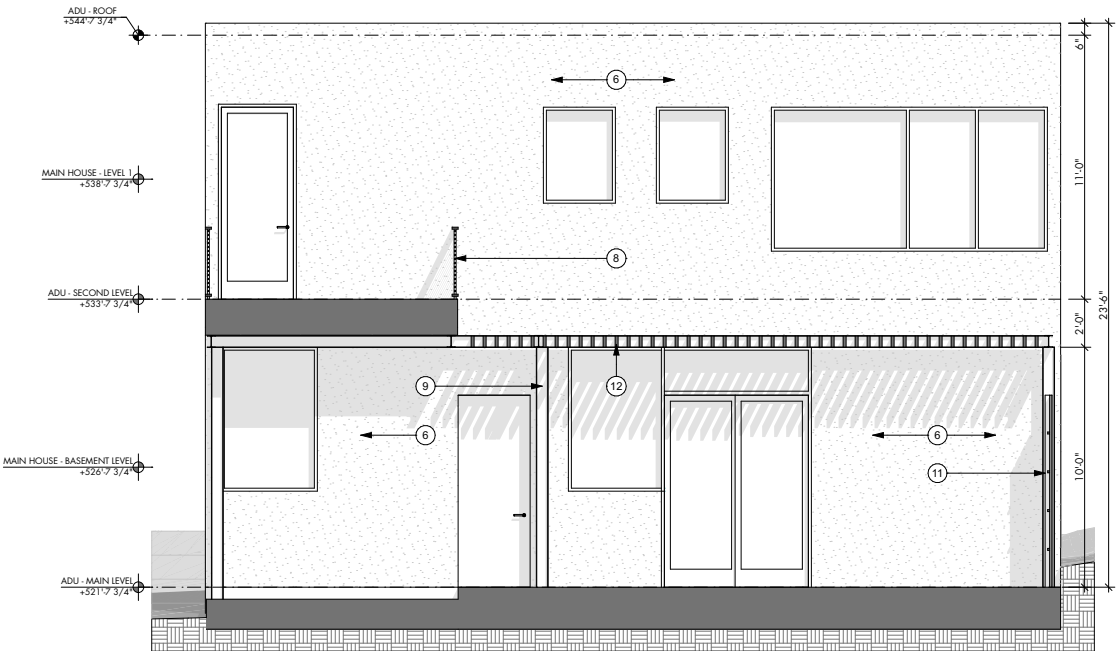

ADU - EAST ELEVATION

SCALE: 1/4" = 1'-0"

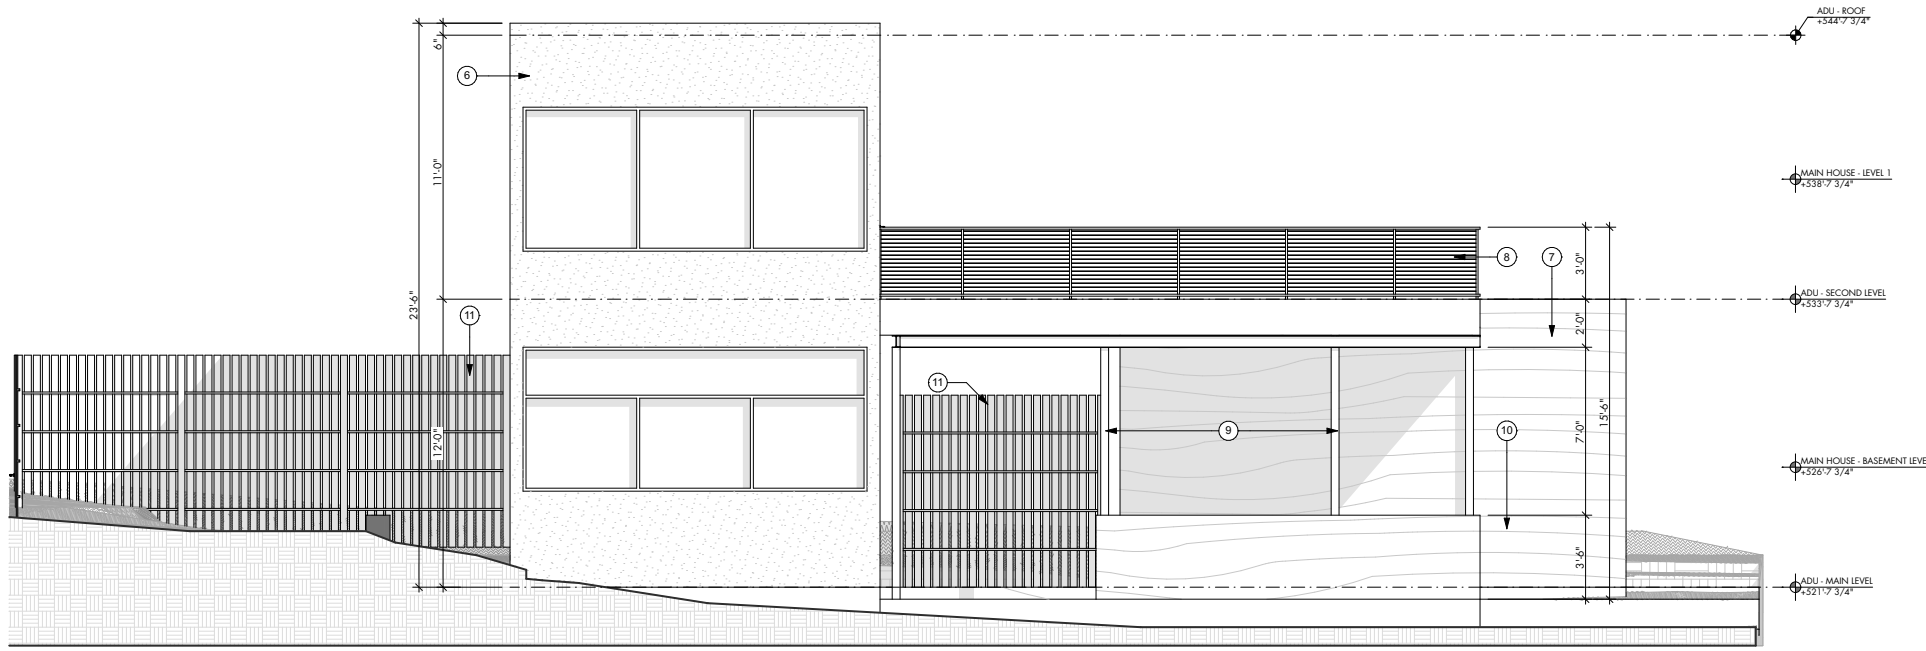

ADU - SOUTH ELEVATION

SCALE: 1/4" = 1'-0"

ADU - EXTERIOR ELEVATIONS



LONGITUDINAL SIDE PERSPECTIVE



ADU - EXTERIOR REAR PERSPECTIVE



ADU - EXTERIOR REAR PERSPECTIVE



ADU - EXTERIOR REAR PERSPECTIVE




ADU - EXTERIOR FRONT PERSPECTIVE



LONGITUDINAL SIDE PERSPECTIVE




BIRDSEYE - SITE PERSPECTIVE

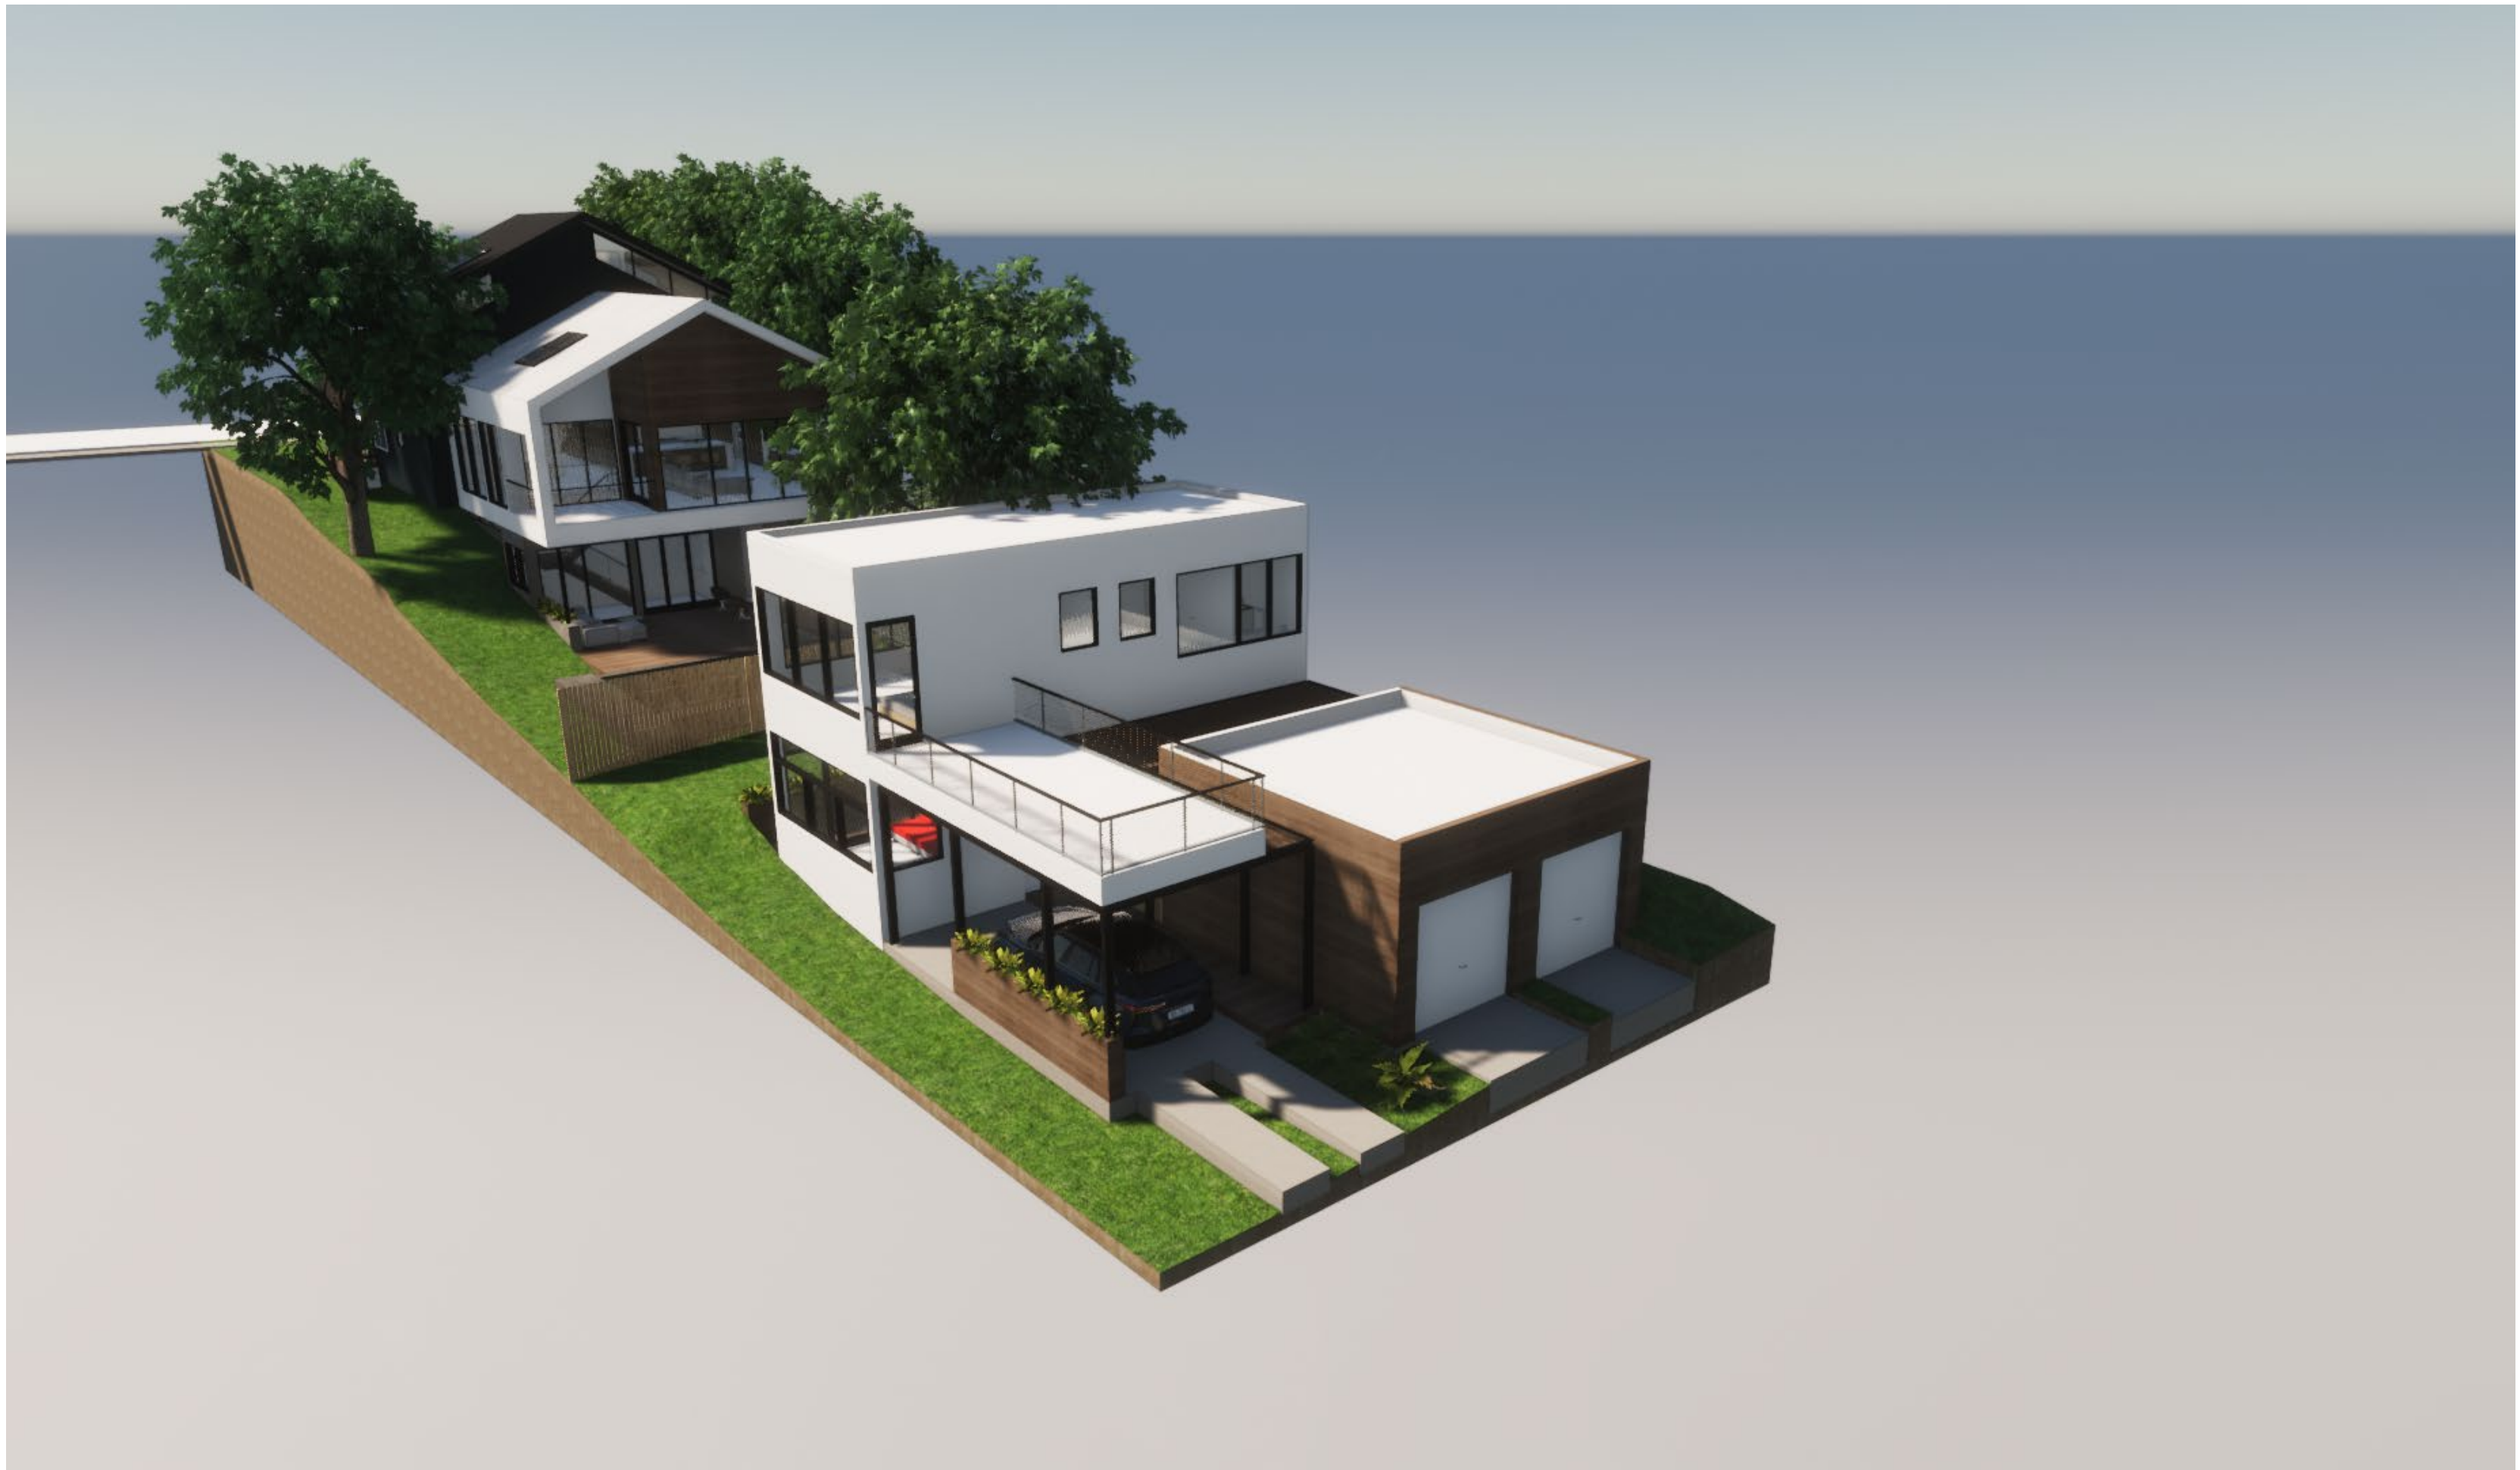

BIRDSEYE - SITE PERSPECTIVE



BIRDSEYE - SITE PERSPECTIVE

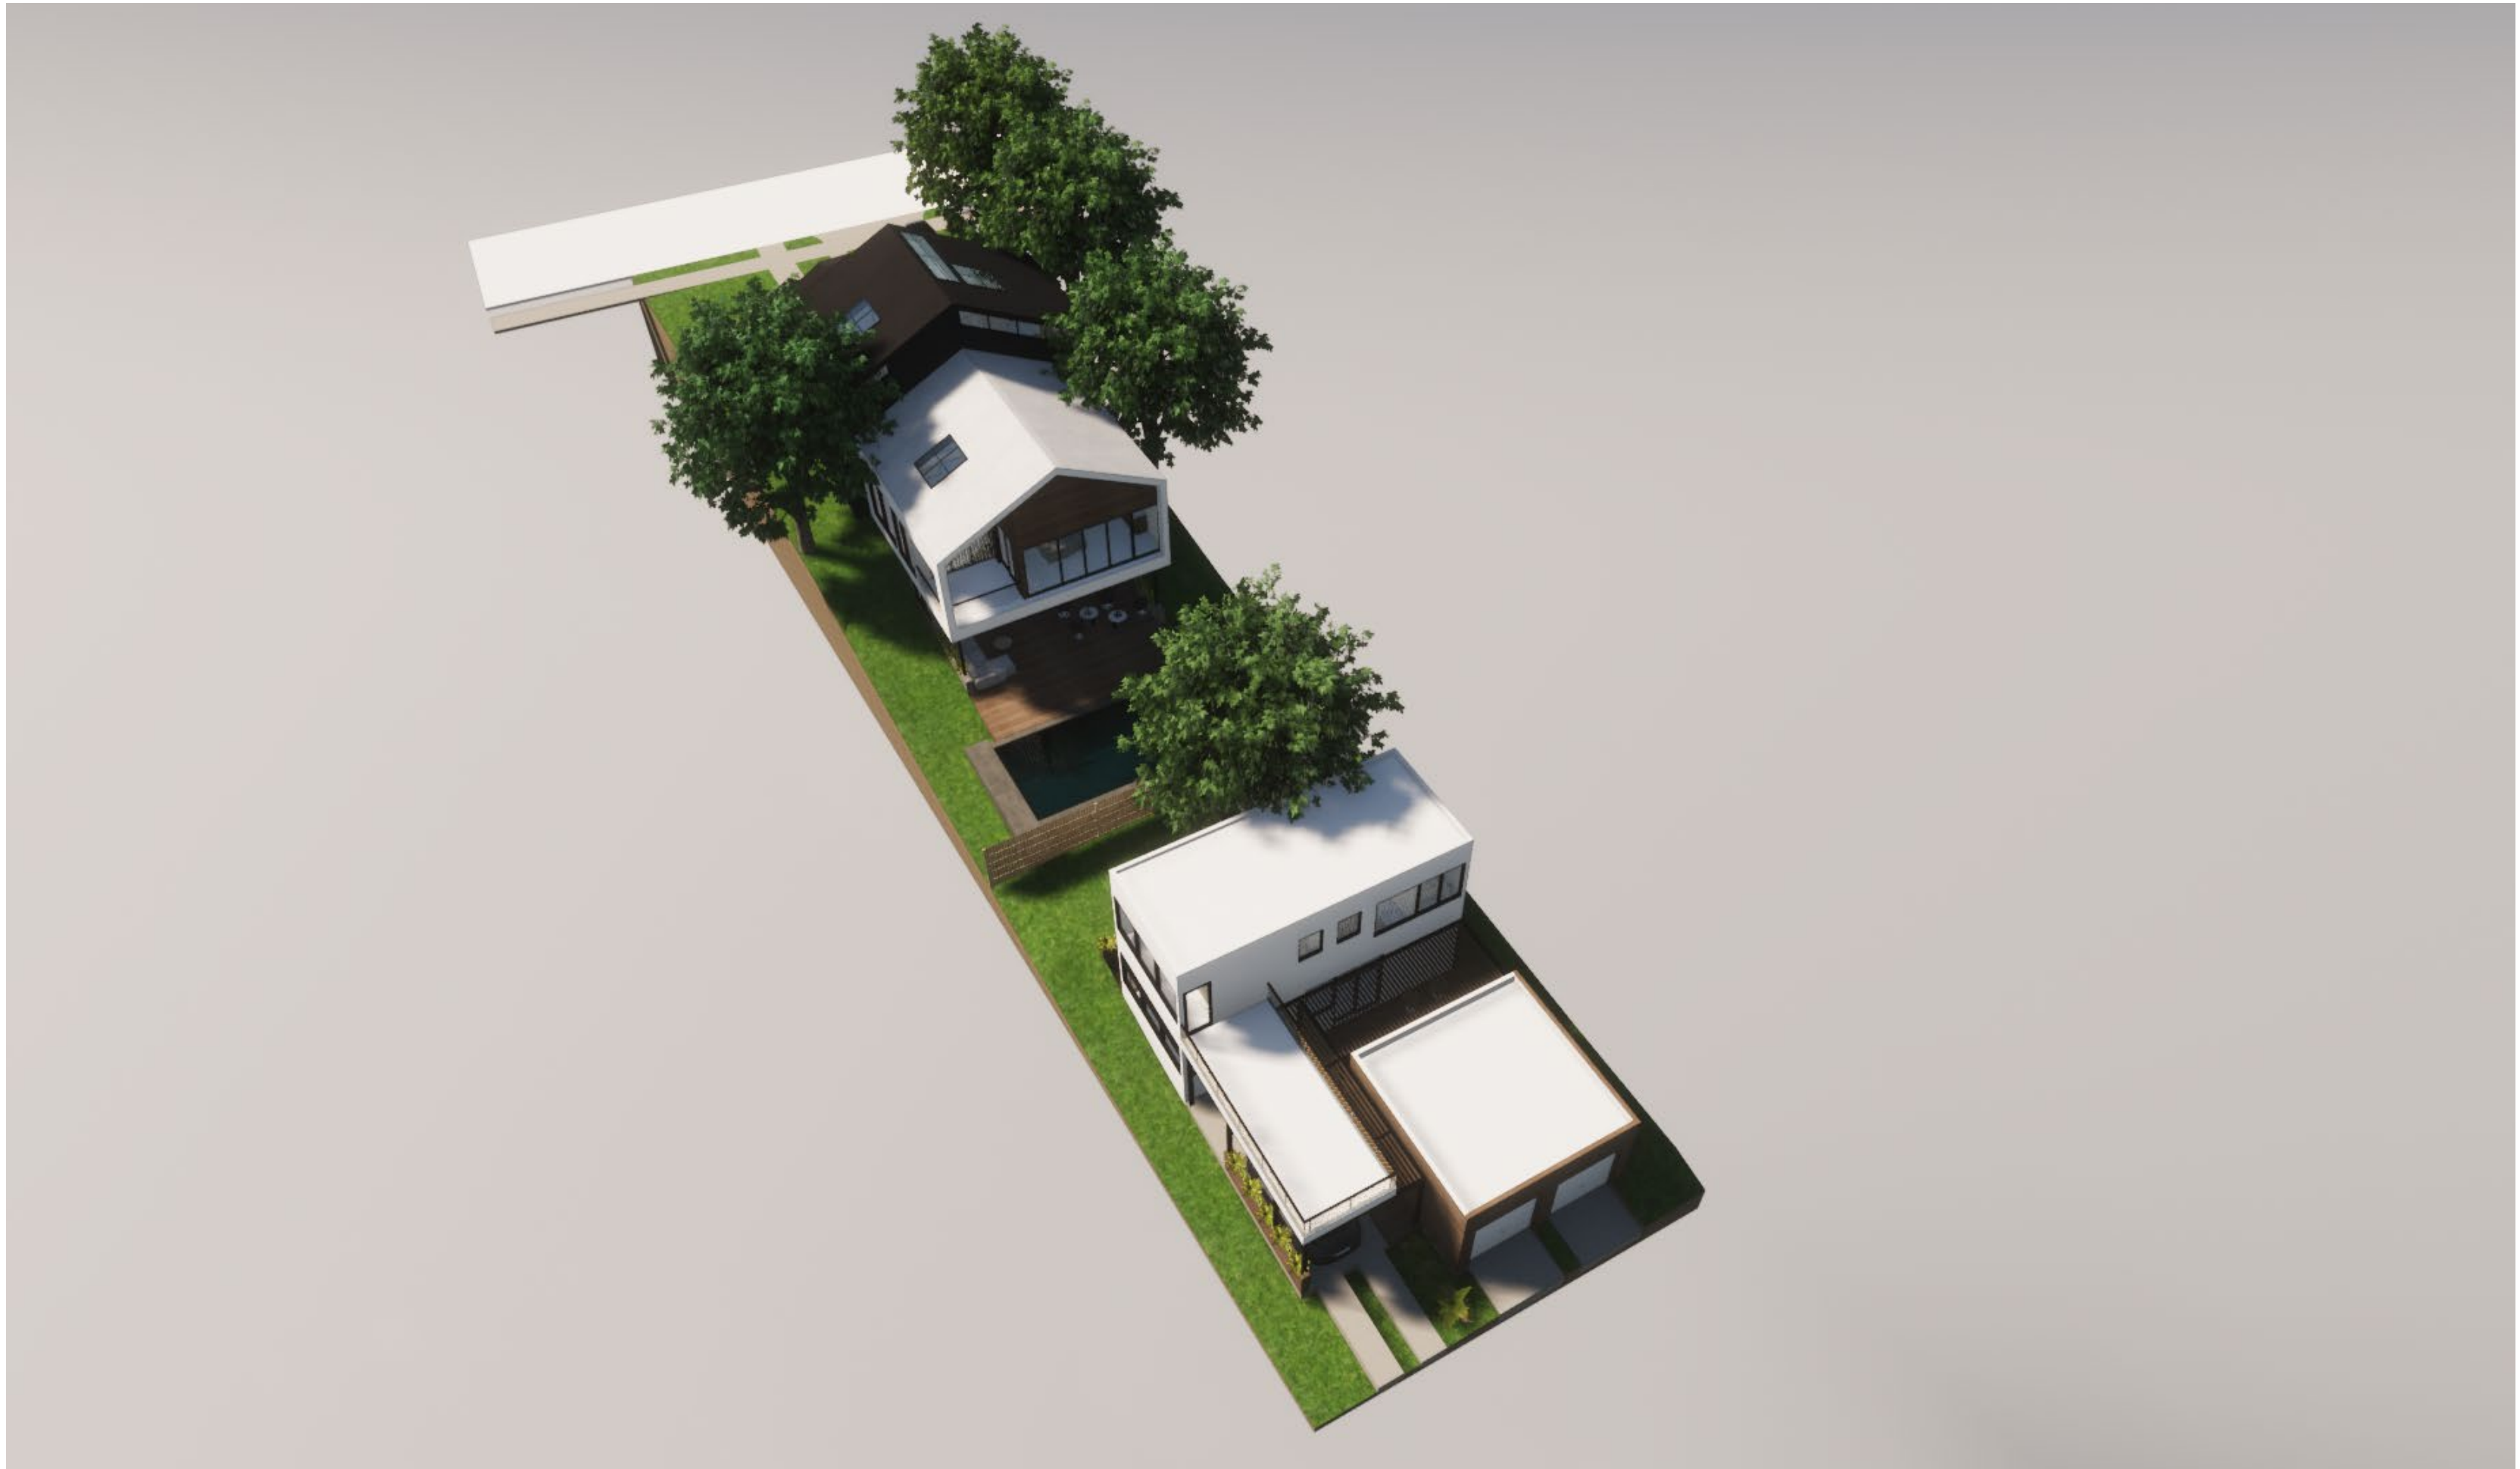

BIRDSEYE - SITE PERSPECTIVE